Outdoor Products



Table of contents

01 Uplights ---- 03

Mini Uplights ---- 04

COB Uplights ---- 06

02 Garden Spike Lights ---- 12

03 Surface Mounted Low Profile Pathway Lights ---- 17

04 Step Lights ---- 22

05 Globe ---- 28

06 Wall Lights ---- 31

07 Bollard ---- 38


08 Surface Downlights ---- 40

09 Wall Washers ---- 48

01


Uplights

Mini Uplights

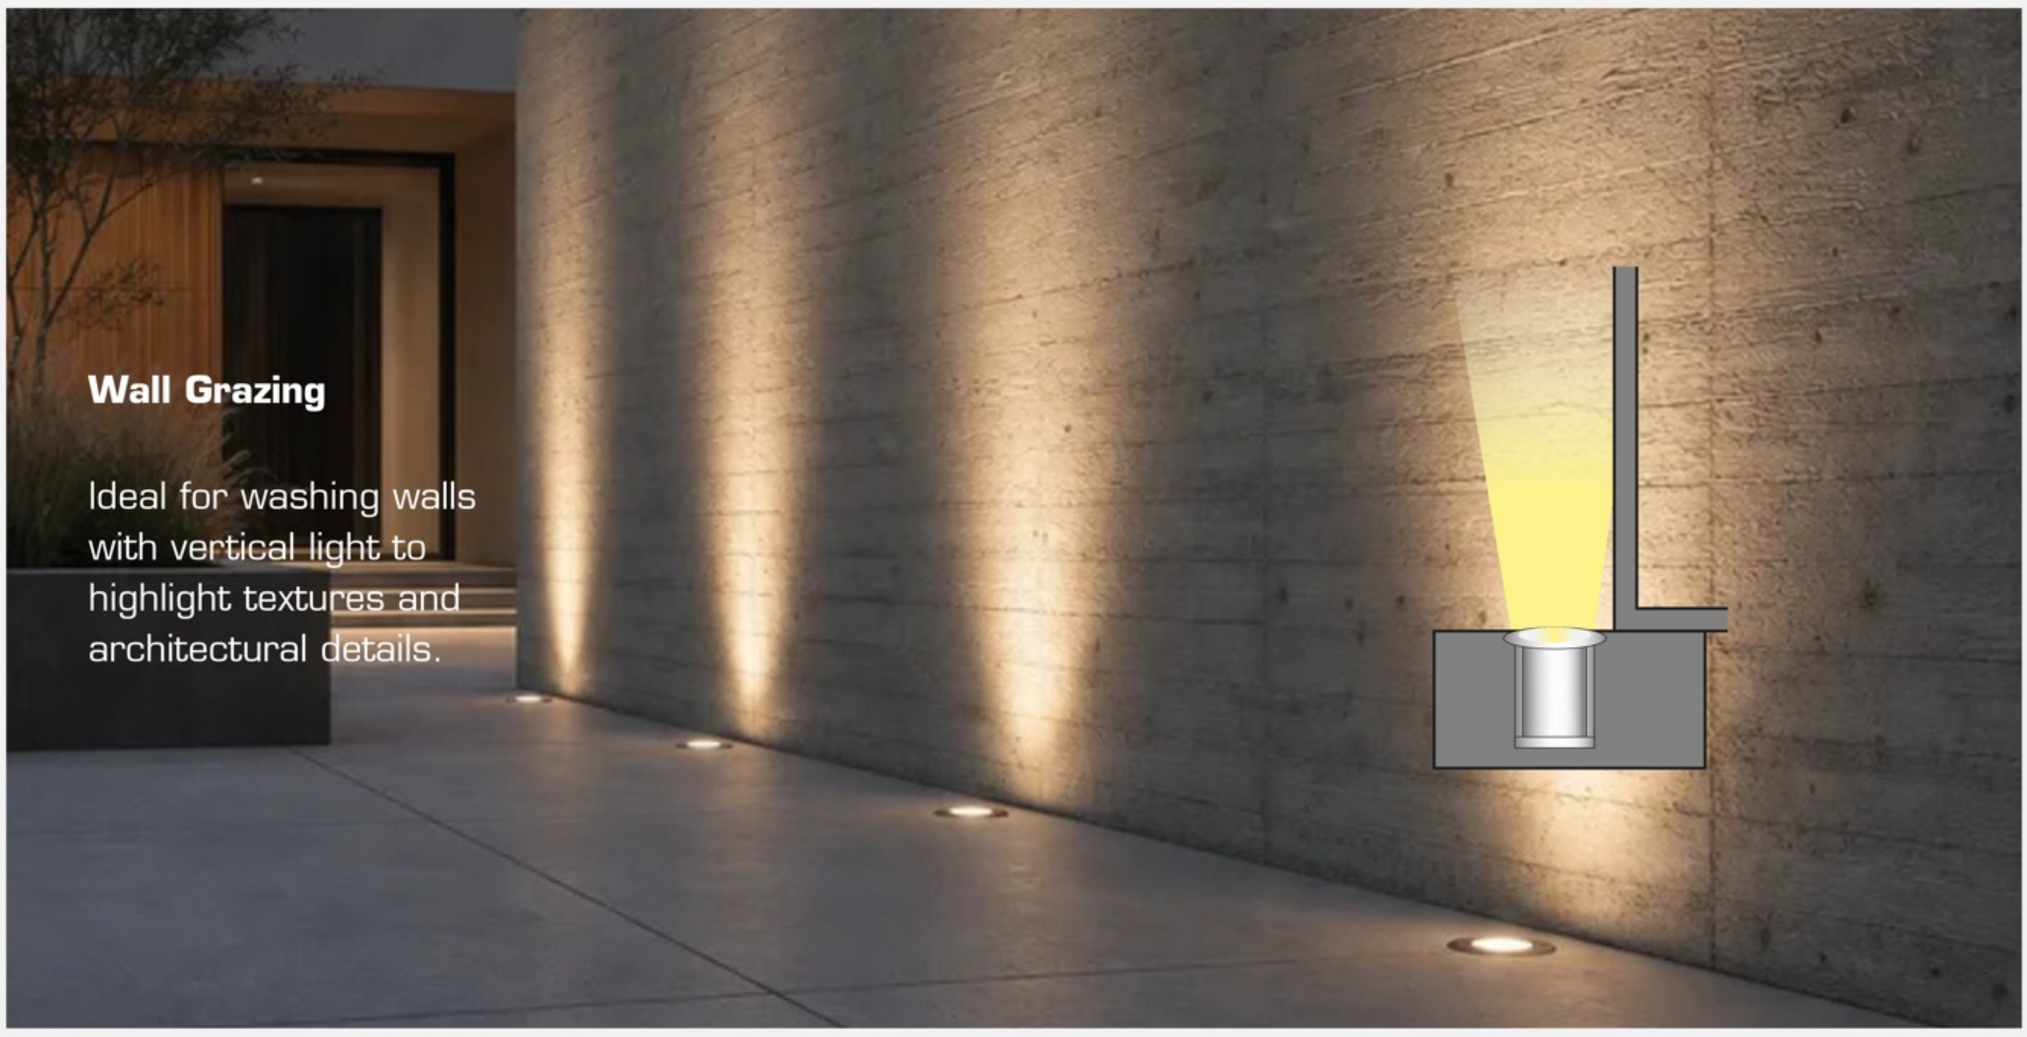

Wall Grazing

Ideal for washing walls with vertical light to highlight textures and architectural details.

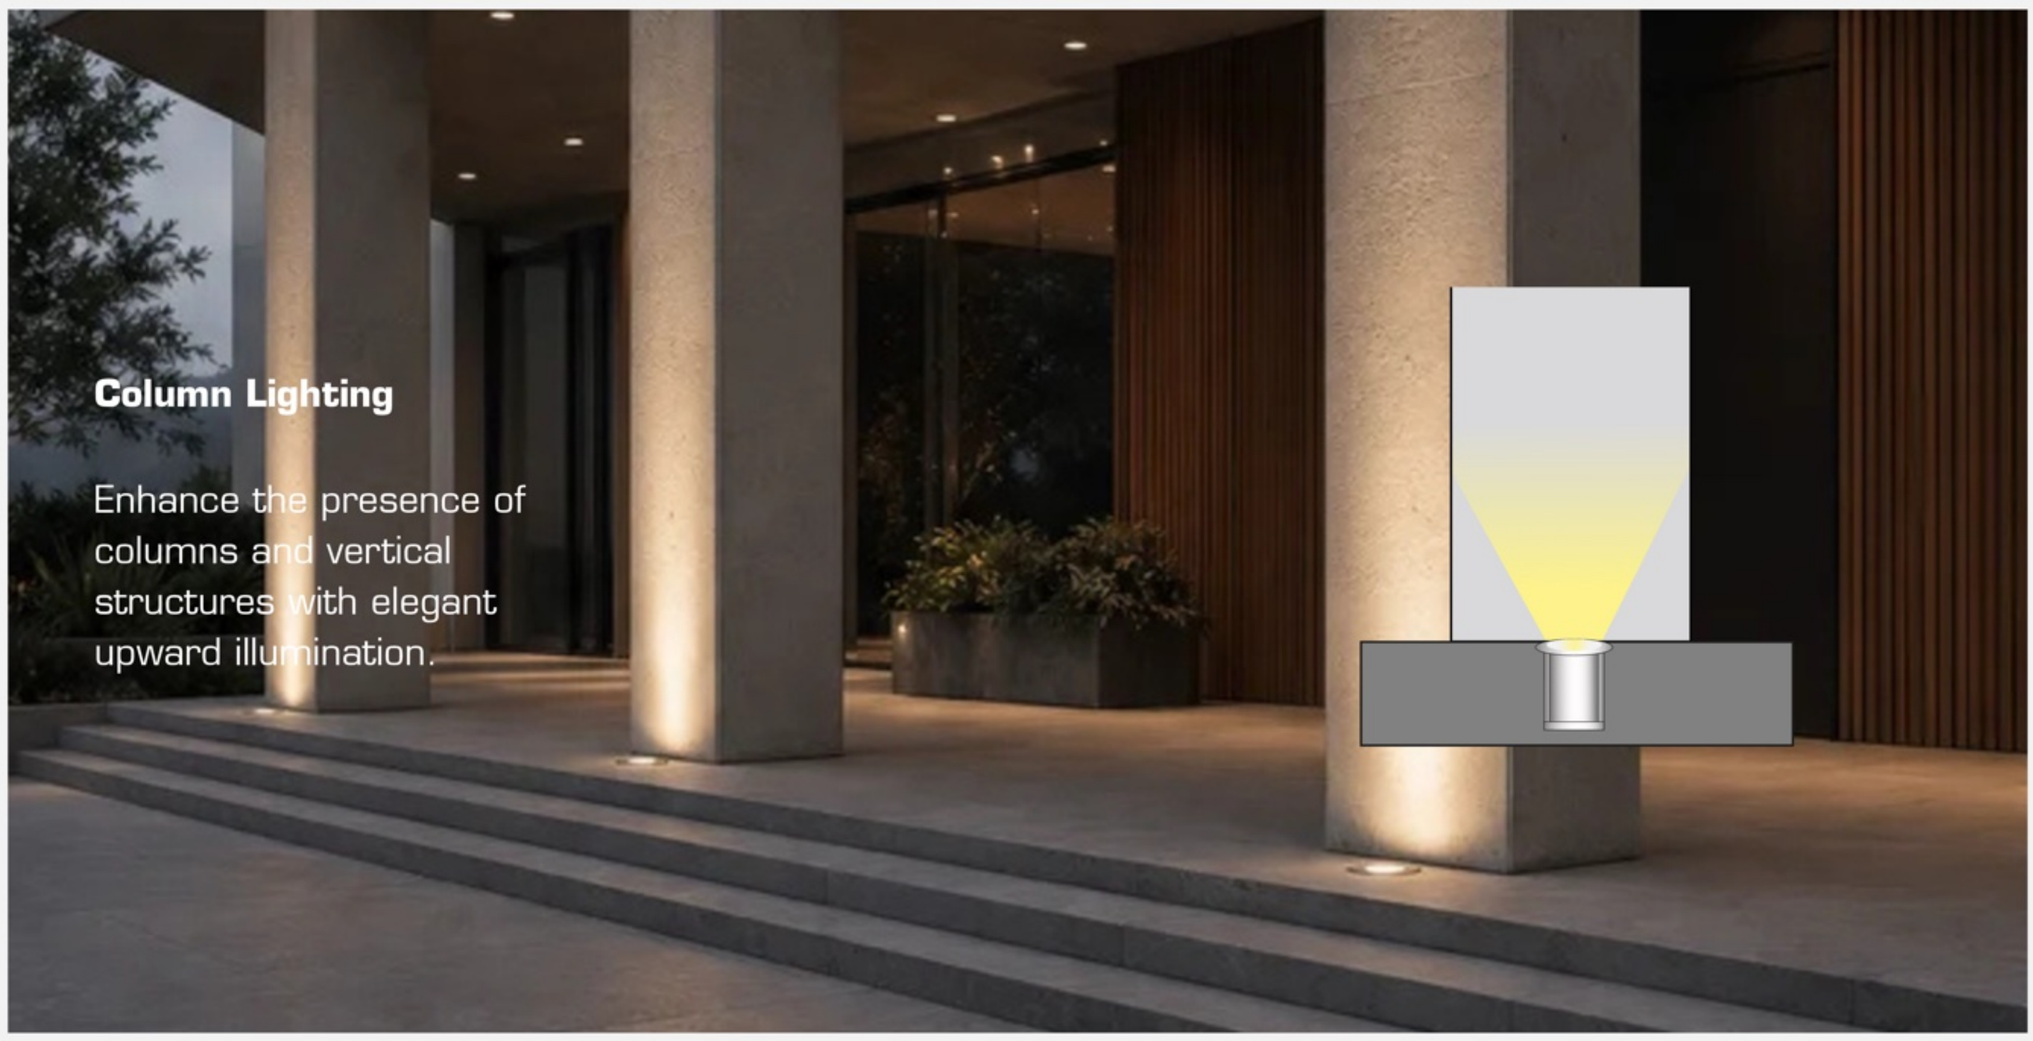

Column Lighting

Enhance the presence of columns and vertical structures with elegant upward illumination.



Landscape and Tree Lighting

Perfect for highlighting trees, plants, and landscape features to create depth and ambience.



332314 **UP-M-1WRM-HP-RD/RC-2216/WT-1W-ILED**

- Mini up light
- Watt:1W
- Led:Bridgelux
- Driver： Customize quality standard
- size： D27.5*H67mm
- AC100-240V 50/60Hz
- Beam angle:24°
- Material:stainless steel+aluminum
- Lumen:75lm/w Ra80
- PF:0.5
- IP65



332315 **UP-M-1WRM-RD/RC-2207/ SL-1W-ILED**

- Up light
- Watt:1W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:D42*H72.5 mm
- AC100-240V 50/60Hz
- Beam angle:24°
- Material:stainless steel+ aluminum
- 70Lm/w Ra90
- PF:0.5
- IP65



332316 **UP-M-3WRM-RD/RC-2207/ SL-3W-ILED**

- Up light
- Watt:3W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:D52*H82.5mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:stainless steel+ aluminum
- 70Lm/w Ra80
- PF:0.5
- IP65



332317 **UP-M-6WRM-RD/RC-2207/SL-6W-ILED**

- Up light
- Watt:6W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:D62*H88.5mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:stainless steel+aluminum
- 70Lm/w Ra80
- PF:0.5
- IP65




332318 **UP-M-9WRM-RD/RC-2207/ SL-9W-ILED**

- Up light
- Watt:9W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:D75*H95mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:stainless steel+ aluminum
- 70Lm/w Ra80
- PF:0.5
- IP65

COB Uplights


Wall Grazing

Ideal for grazing walls with vertical light to enhance textures and architectural details.

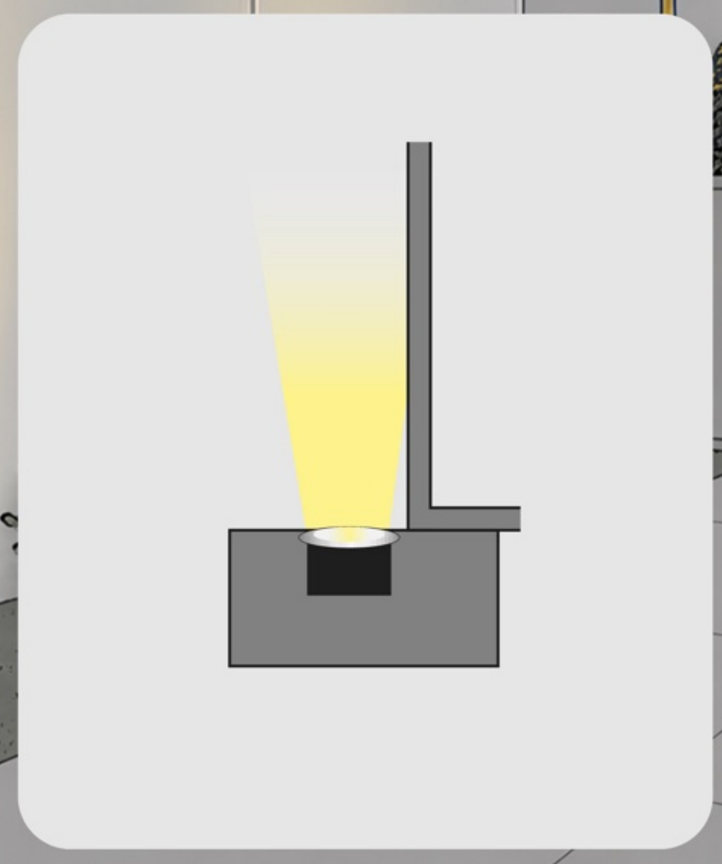


Column Lighting

Enhance the presence of columns and vertical structures with elegant upward illumination.

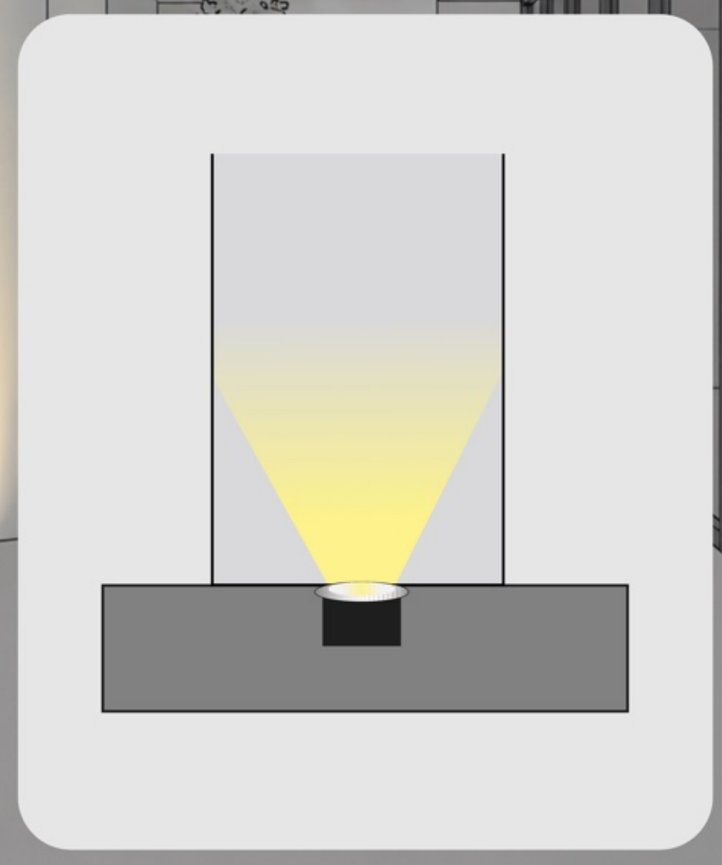

Landscape and Tree Lighting

Perfect for highlighting trees, plants and landscape features to create depth and atmosphere.

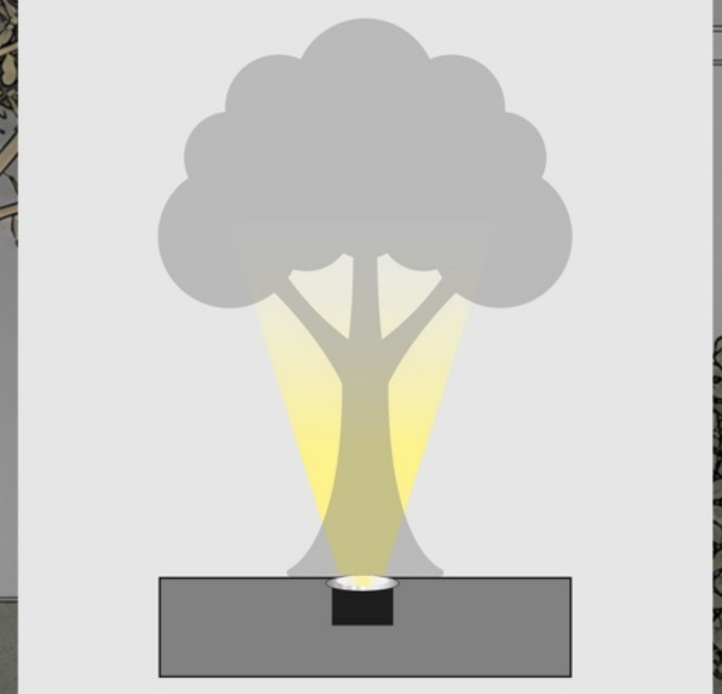



332328 **UP-COB-30WRM-RD/RC-2208/GR-30W-ILED**

- Up light
- Watt:30W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:Ø200*90mmm
- AC100-240V
- 50/60Hz
- Beam angle:60°
- Material: Aluminum+PMMA+Glass
- 75Lm/w
- PF:0.9
- Ra90
- IP65



332329 **UP-COB-40WRM-RD/RC-2208/GR-40W-ILED**

- Up light
- Watt:40W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:Ø250*90mmm
- AC100-240V 50/60Hz
- Beam angle:60°
- Material: Aluminum+PMMA+Glass
- 75Lm/w
- Ra90
- PF:0.9
- IP65



332330 **UP-COB-50WRM-RD/RC-2208/GR-50W-ILED**

- Up light
- Watt:50W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:Ø300*90mmm
- AC100-240V
- 50/60Hz
- Beam angle:60°
- Material:Aluminum+PMMA+Glass+
- 75Lm/w
- Ra90
- PF:0.9
- IP65



332331 **UP-HP-3WRM-RD/RC-D002-3W-ILED**

- Up light
- Watt:3W
- Led:Bridgelux
- Driver:Customize quality standard
- Diameter:Ø80*75mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA+Glass+ stainless steel
- 75Lm/w
- Ra80
- PF:0.5
- IP65



332332 **UP-HP-5WRM-RD/RC-D004-5W-ILED**

- Up light
- Watt:5W
- Led:Bridgelux
- Driver: Customize quality standard
- Diameter:Ø100*75mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA+Glass+ stainless steel
- 75Lm/w
- Ra80
- PF:0.5
- IP65



332333 **UP-HP-7WRM-RD/RC-D006-7W-ILED**

- Up light
- Watt:7W
- Led:Bridgelux
- Driver: Customize quality standard
- Diameter:Ø120*90mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA+Glass+ stainless steel
- 75Lm/w
- Ra80
- PF:0.5
- IP65



332334 **UP-HP-9WRM-RD/RC-D007-9W-ILED**

- Up light
- Watt:9W
- Led:Bridgelux
- Driver: Customize quality standard
- Diameter:Ø150*90mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA+Glass+ stainless steel
- 80Lm/w
- Ra80
- PF:0.9
- IP65



332335 **UP-HP-12WRM-RD/RC-D008-12W-ILED**

- Up light
- Watt:12W
- Led:Bridgelux
- Diameter:Ø160*90mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA+Glass+ stainless steel
- 80Lm/w
- Ra80
- PF:0.9
- IP65



332336 **UP-HP-18WRM-RD/RC-D010-18W-ILED**

- Up light
- Watt:18W
- Led:Bridgelux
- Driver: Customize quality standard
- Diameter:Ø180*90mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA+Glass+ stainless steel
- 80Lm/w
- Ra80
- PF:0.9
- IP65



332337 **UP-HP-24WRM-RD/RC-D011-24W-ILED**

- Up light
- Watt:24W
- Led:Bridgelux
- Driver: Customize quality standard
- Diameter:Ø200*90mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA+Glass+ stainless steel
- 80Lm/w
- Ra80
- PF:0.9
- IP65



332338 **UP-HP-36WRM-RD/RC-DM-D012-36W-ILED**

- Up light
- Watt:36W
- Led:Bridgelux
- Driver: Customize quality standard
- Diameter:Ø220*90mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA+Glass+ stainless steel
- 80Lm/w
- Ra80
- PF:0.9
- IP65



332343 **UP-HP-6WRM-SQ/RC-S1036-6-ILED**

- Square Up light
- Watt:6LED*1W=6W
- LED:OSRAM CHIP
- Body size： 120*120 H70mm
- Lumen:70LM/W
- Beam angle:30°
- Material： 201StainlesSteel+ aluminum
- Ra80
- PF:0.5
- IP65




332344 **UP-HP-9WRM-SQ/RC-S1037-9-ILED**

- Square Up light Watt:9LED
- 1W=9W LED:OSRAM CHIP
- Body size： 150*150 H75mm
- Lumen:75LM/W
- Beam angle:30°
- Material:201StainlesSteel+aluminum
- Ra80
- PF:0.90
- IP65




332435 **UP-HP-12WRM-SQ/RC-S1038-12-ILED**

- Square Up light
- Watt:12LED*1W=12W
- LED:OSRAM CHIP
- Body size： 180*180 H75mm
  Lumen:75LM/W
- Beam angle:30°
- Material:201 StainlesSteel+aluminum
- Ra80
- PF:0.90
- IP65

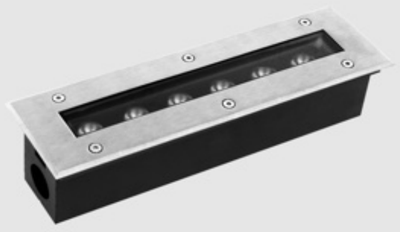


332347 **UP-HP-6WRM-RT/RC-FND-DMD6-6W-300H-ILED**

- Rectangle Up light
- Watt:6LED*1W=6W
- LED:PHILIPS CHIP
- AC85-265V
- Body size： 300*90 H75mm
- Cut size： 290*85 H55
  Lumen:75LM/W
- Beam angle:24°
- Material： 201 StainlessSteel+ aluminum
- Ra80
- PF:0.90
- IP66

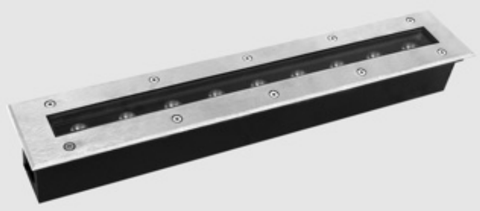


332348 **UP-HP-9WRM-RT/RC-FND-DMD6-9W-500H-ILED**

- Rectangular Up light
- Watt： 9LED*1W=9W
- LED:OSRAM CHIP
- AC85-265V
- Body size： 500*90 H75mm
- Cut size： :490*85 H55
  Lumen:80LM/W
- Beam angle:24° Material： 201 StainlessSteel+ aluminum
- Ra80
- PF:0.90
- IP66

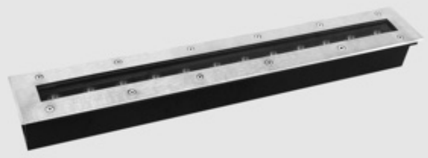


332349 **UP-HP-12WRM-RT/RC-FND-DMD6-12W-600H-ILED**

- Rectangular Up light
- Watt: 12LED*1W=12W
- LED: PHILIPS CHIP
- AC85-265V
- Body size: 600*90 H75mm
- Cut size: 590*85 H55
- Lumen:80LM/W
- Beam angle:24°
- Material: 201 StainlessSteel+ aluminum
- Ra80
- PF:0.90
- IP66

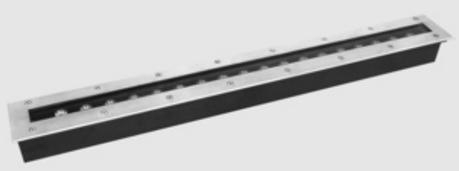

332350 **UP-HP-18WRM-RT/RC-FND-DMD6-18W-800H-ILED**

- Rectangular Up light
- Watt: 18LED*1W=18W
- LED:PHILIPS CHIP
- AC85-265V
- Body size: 800*90 H75mm
- Cut size: 790*85 H55
- Lumen: 80LM/W
- Beam angle: 24°
- Material: 201 StainlessSteel+ aluminum
- Ra80
- PF:0.90
- IP66

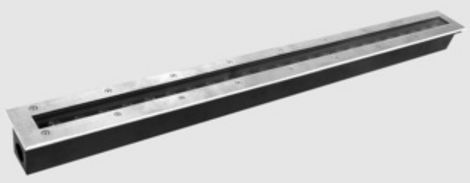

332351 **UP-HP-24WRM-RT/RC-FND-DMD6-24W-1000H-ILED**


- Rectangular Up light
- Watt： 24LED*1W=24W
- LED:PHILIPS CHIP
- AC85-265V
- Body size： 1000*90 H75mm
- Cut size： 990*85 H55
- Lumen:80LM/W
- Beam angle:24°
- Material： 201StainlessSteel+
- aluminum
- Ra80
- PF:0.90
- IP66

02

Garden Spike Lights

Garden Spike Lights



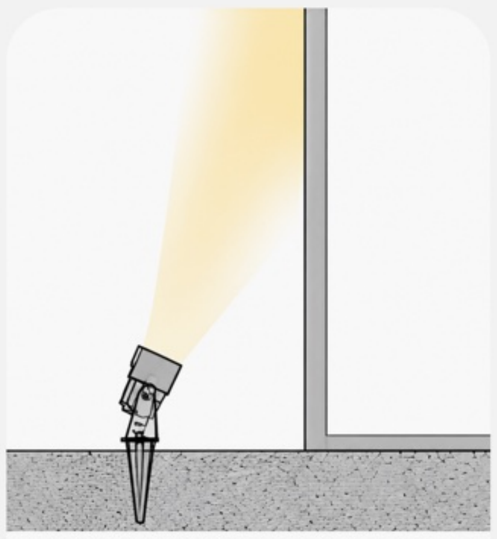

Wall Grazing

Ideal for grazing walls and vertical surfaces to enhance texture and architectural details.





Tree Uplighting

Perfect for highlighting trees and large plants to create depth and a dramatic nighttime effect.





Landscape and Feature Lighting

Ideal for accenting shrubs, landscape features, and garden elements to create ambience.



332319 **SPK-3WRM-RD/SR-2801/GR-3W-ILED**

- Spike light
- Watt:3W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:D43*260mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA
- 65Lm/w Ra80
- PF:0.5
- IP65



332320 **SPK-7WRM-RD/SR-2802/GR-7W -ILED**

- Spike light
- Watt:7W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:D65*285mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA
- 75Lm/w Ra80
- PF:0.5
- IP65



332321 **SPK-12WRM-RD/SR-2802/GR-12W-ILED**

- Spike light
- Watt:12W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:D80*300mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA
- 85Lm/w Ra80
- PF:0.90
- IP65



332322 **SPK-C-7WRM-RD/SR-2815/GR -7W-ILED**

- Spike light
- Watt:7W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:D70*H300mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA
- 75Lm/w Ra80
- PF:0.5
- IP65



332323 **SPK-C-12WRM-RD/SR-2815/GR-12W-ILED**

- Spike light
- Watt:12W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:D85*H330mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA
- 5Lm/w Ra80
- PF:0.90
- IP65



332324 **SPK-C-G-7WRM-RD/SR-DC001-7W-ILED**

- Projector
- Watt:7W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:Ø96*W152*H230
- AC100-240V 50/60Hz
- Beam angle:24°
- Material: Aluminum+PMMA+Glass
- 70Lm/w Ra80
- PF:0.5
- IP65



332325 **SPK-C-7WRM-RD/SR-DC001-7W-ILED**

- Spike light
- Watt:7W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:Ø96*W152*H350mm
- AC100-240V 50/60Hz
- Beam angle:24°
- Material: Aluminum+PMMA+Glass
- 70Lm/w Ra80
- PF:0.5
- IP65



332326 **SPK-C-G-18WRM-RD/SR-DC002-18W-ILED**

- Projector
- Watt:18W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:Ø140*W216*H300
- AC100-240V 50/60Hz
- Beam angle:24°
- Material:stainless steel+ aluminum
- 70Lm/w Ra80
- PF:0.9
- IP65



332327 **SPK-C-18WRM-RD/SR-DC002-18W-ILED**

- Spike light
- Watt:18W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:Ø140*W216*H450
- AC100-240V 50/60Hz
- Beam angle:24°
- Material:stainless steel+ aluminum
- 70Lm/w Ra80
- PF:0.9
- IP65



332323 **SPK-C-12WRM-RD/SR-2815/GR-12W-ILED**

- Spike light
- Watt:12W
- Led:Bridgelux
- Driver： Customize quality standard
- Size:D85*H330mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:Aluminum+PMMA
- 5Lm/w Ra80
- PF:0.90
- IP65




332432 **SPK-BEAM-10WRM-RD/SR-G0210-ILED**

- LED Projector light
- LED: CREE 10W×1
- Driver:Customize quality standard
- Voltage:AC85-265V 50/60Hz
- Size:70x135x120
- Beam angle: 5°
- Material:aluminum
- Ra80
- IP65
- PF:0.5


03

Surface Mounted Low Profile Pathway Lights

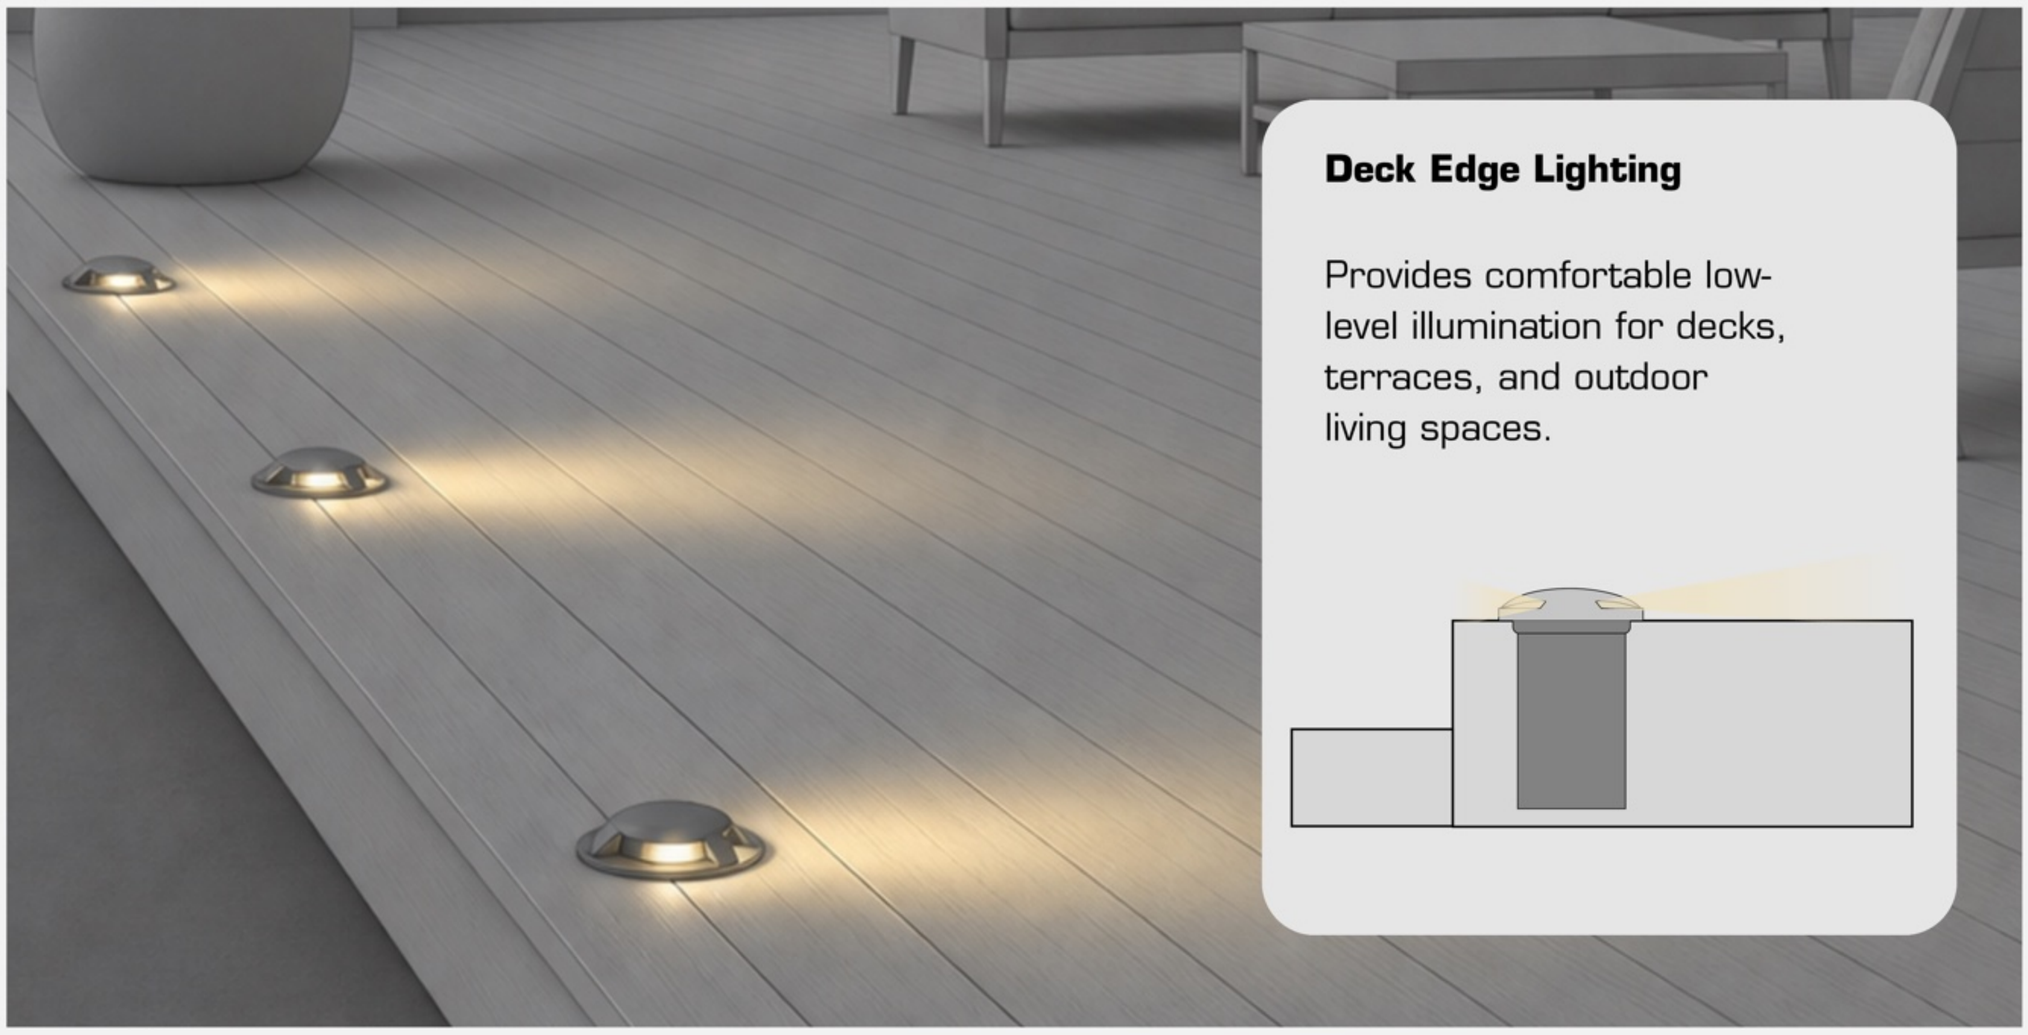

Deck Edge Lighting

Provides comfortable low-level illumination for decks, terraces, and outdoor living spaces.

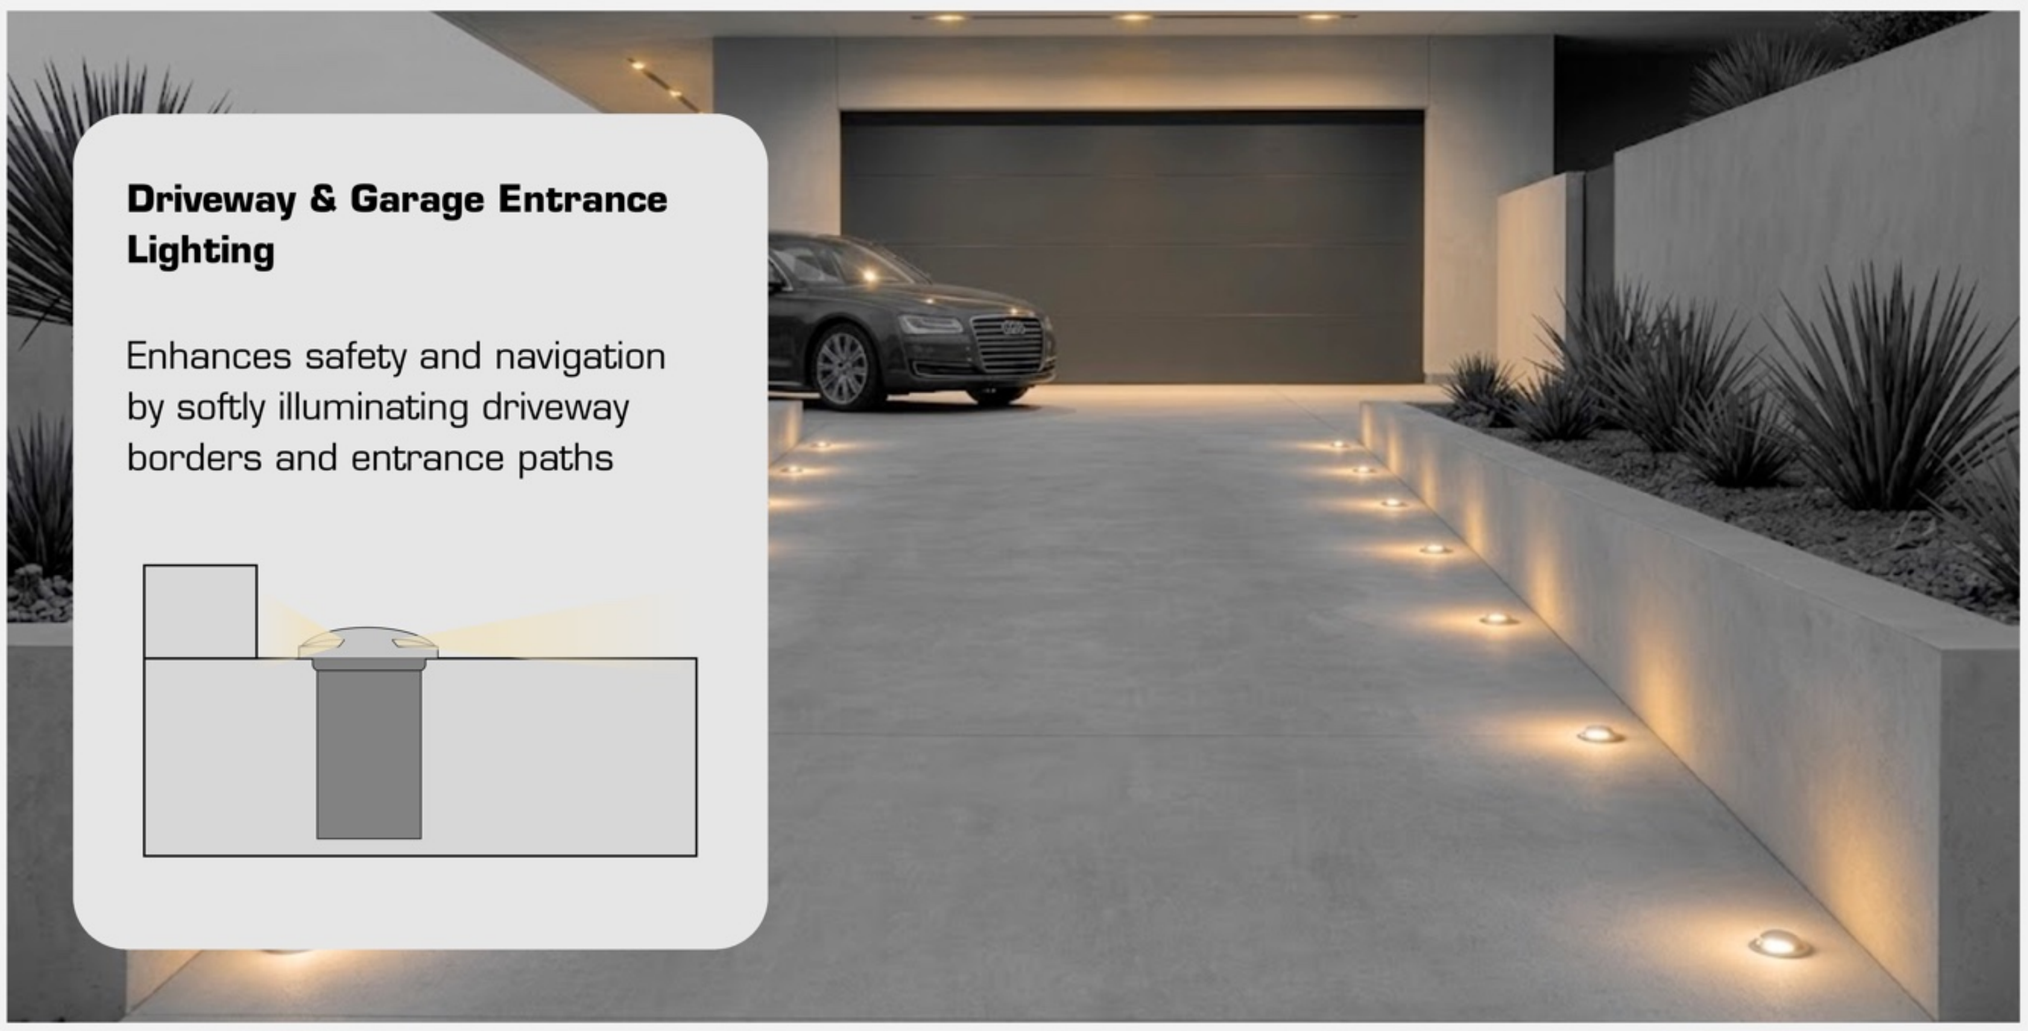

Driveway & Garage Entrance Lighting

Enhances safety and navigation by softly illuminating driveway borders and entrance paths



Pathway Guidance

Creates safe and inviting pedestrian routes with discreet horizontal illumination.



332339 **UP-M-1WAY-1WRM-HP-RD/RC-BD02-1W-ILED**

- One side up light
- Watt:1W
- Led:Bridgelux
- Driver: Customize quality standard
- Size: D42*H82 mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:304 stainless steel+aluminum
- Ra80
- PF:0.5
- IP65



332340 **UP-M-2WAY-3WRM-HP-RD/RC-BD02-3W-ILED**

- Two side up light
- Watt:3W
- Led:Bridgelux
- Driver: Customize quality standard
- Size:D52*H95mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material: stainless steel+ aluminum
- Ra80
- PF:0.5
- IP65



332341 **UP-M-3WAY-3WRM-HP-RD/RC-BD02-2-3W-ILED**

- Three side up light
- Watt:3W
- Led:Bridgelux
- Driver: Customize quality standard
- Size:D62*H102mm
- AC100-240V 50/60Hz
- Beam angle:30° Material:stainless steel+. aluminum
- Ra80
- PF:0.5
- IP65



332342 **UP-M-4WAY-3WRM-HP-RD/RC-BD02-2-3W-ILED**

- Four side up light
- Watt:3W
- Led:Bridgelux
- Driver: Customize qualitystandard
- Size:D62*H102mm
- AC100-240V 50/60Hz
- Beam angle:30°
- Material:stainless steel+ aluminum
- Ra80
- PF:0.5
- IP65



332371 **DRV-BL-HP-2WRM-RD/SR-BDB-2W-ILED**

- Pathway light-oneside
- Watt：2W
- Led:Bridgelux
- Body Diameter：100mm
- AC100-240V 50/60Hz
- Material：aluminum
- Ra80
- IP65
- PF:0.5



332372 **DRV-BL-HP-3WRM-RD/SR-BDB-3W-ILED**

- Pathwaylight-oneside
- Watt：3W
- Led:Bridgelux
- Body Diameter：120mm
- AC100-240V 50/60Hz
- Material：aluminum
- Ra 80
- IP65
- PF:0.5



332373 **DRV-BL-HP-4WRM-RD/SR-BDB-4W-ILED**

- Pathwaylight-oneside
- Watt：4W
- Led:Bridgelux
- Body Diameter：150mm
- AC100-240V 50/60Hz
- Material：aluminum
- Ra 80
- IP65
- PF:0.5



332374 **DRV-BL-HP-WRM-RD/SR-BDB-2*2W-ILED**

- Pathway light-two side
- Watt：2*2W
- Led:Bridgelux
- Body Diameter：120mm
- AC100-240V 50/60Hz
- Material：aluminum
- Ra 80
- IP65
- PF:0.5



332375 **DRV-BL-HP-WRM-RD/SR-BDB-2*3W-ILED**

- Pathway light-two side
- Watt：2*3W
- Led:Bridgelux
- Body Diameter：120mm
- AC100-240V 50/60Hz
- Material：aluminum
- Ra 80
- IP65
- PF:0.5




332376 **DRV-BL-HP-WRM-RD/SR-BDB-2*4W-ILED**

- Pathwaylight-two side
- Watt：2*4W
- Led:Bridgelux
- Body Diameter：150mm
- AC100-240V50/60Hz
- Material：aluminum
- Ra 80
- IP65
- PF:0.5

04


Step Light


Step Lights

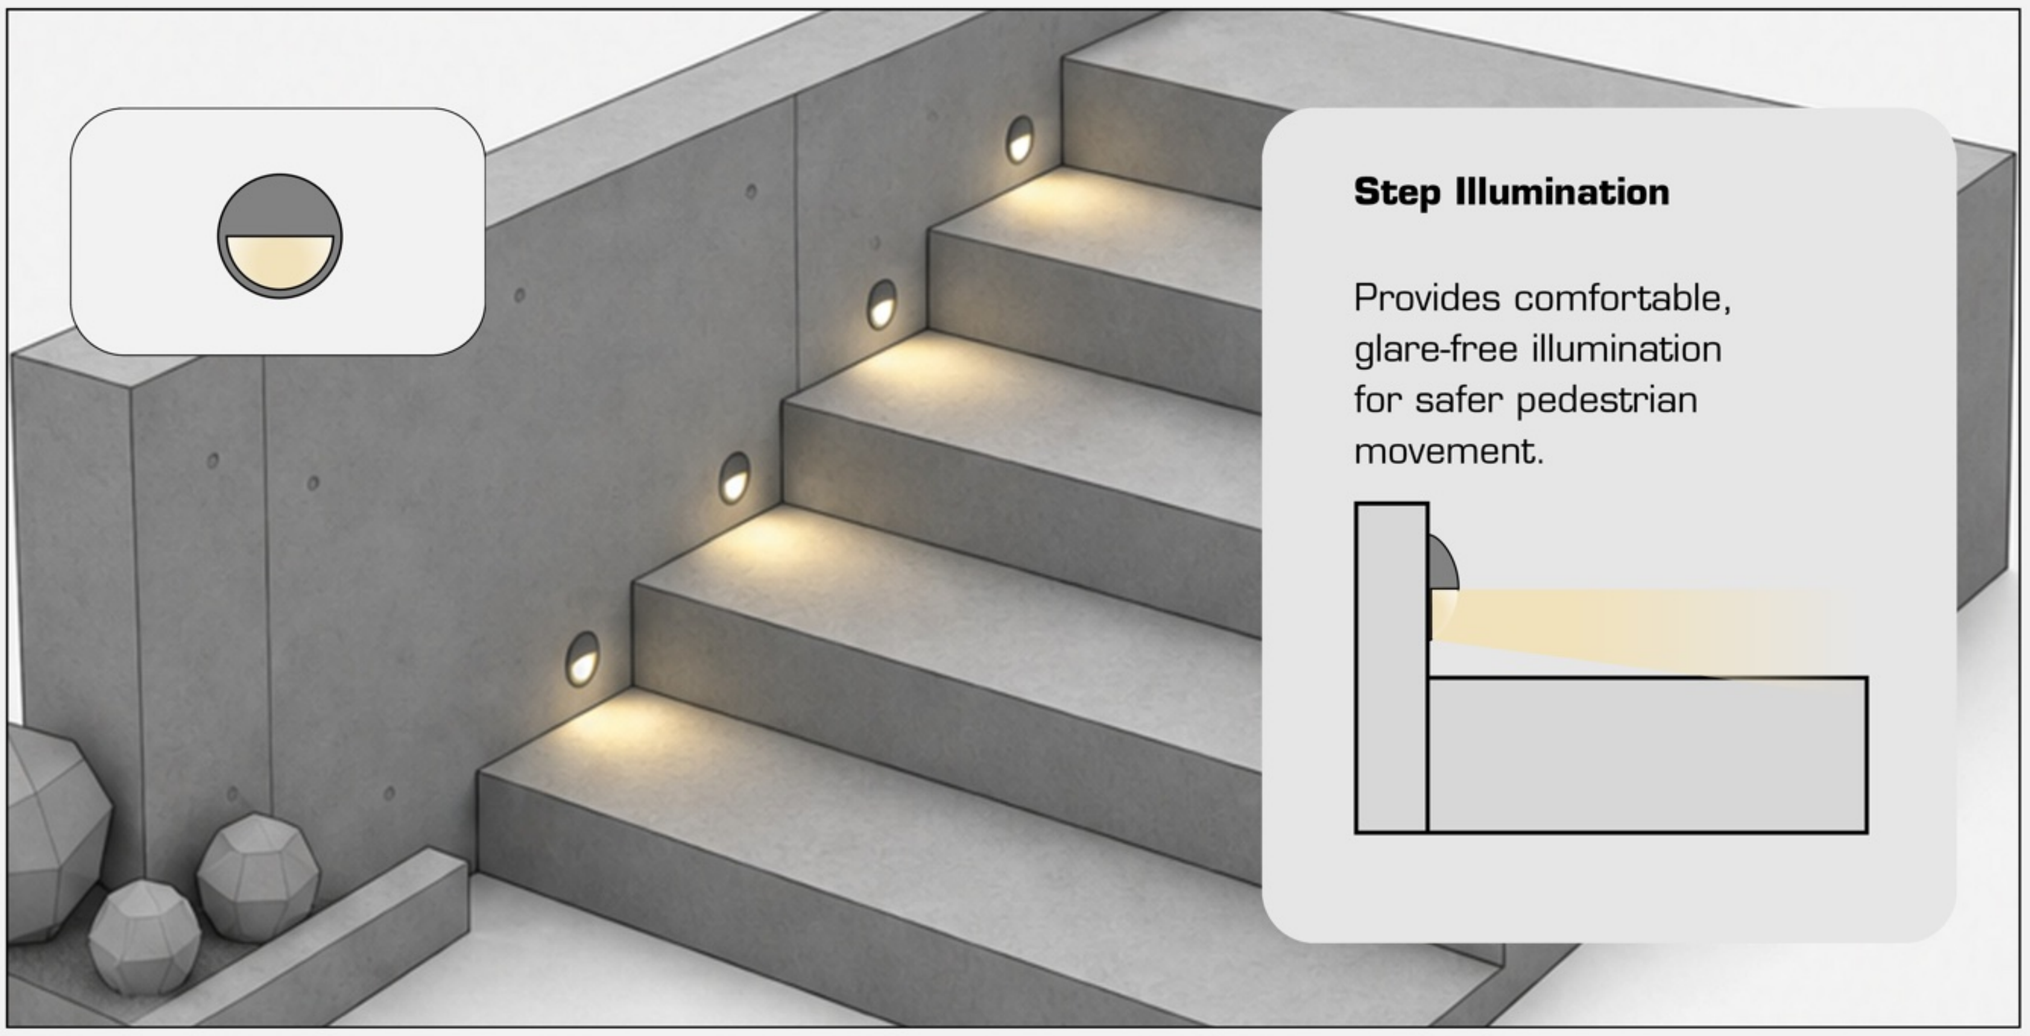

Step Illumination


Provides comfortable, glare-free illumination for safer pedestrian movement.

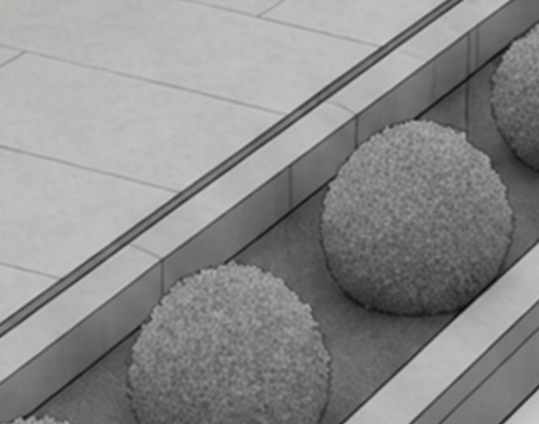

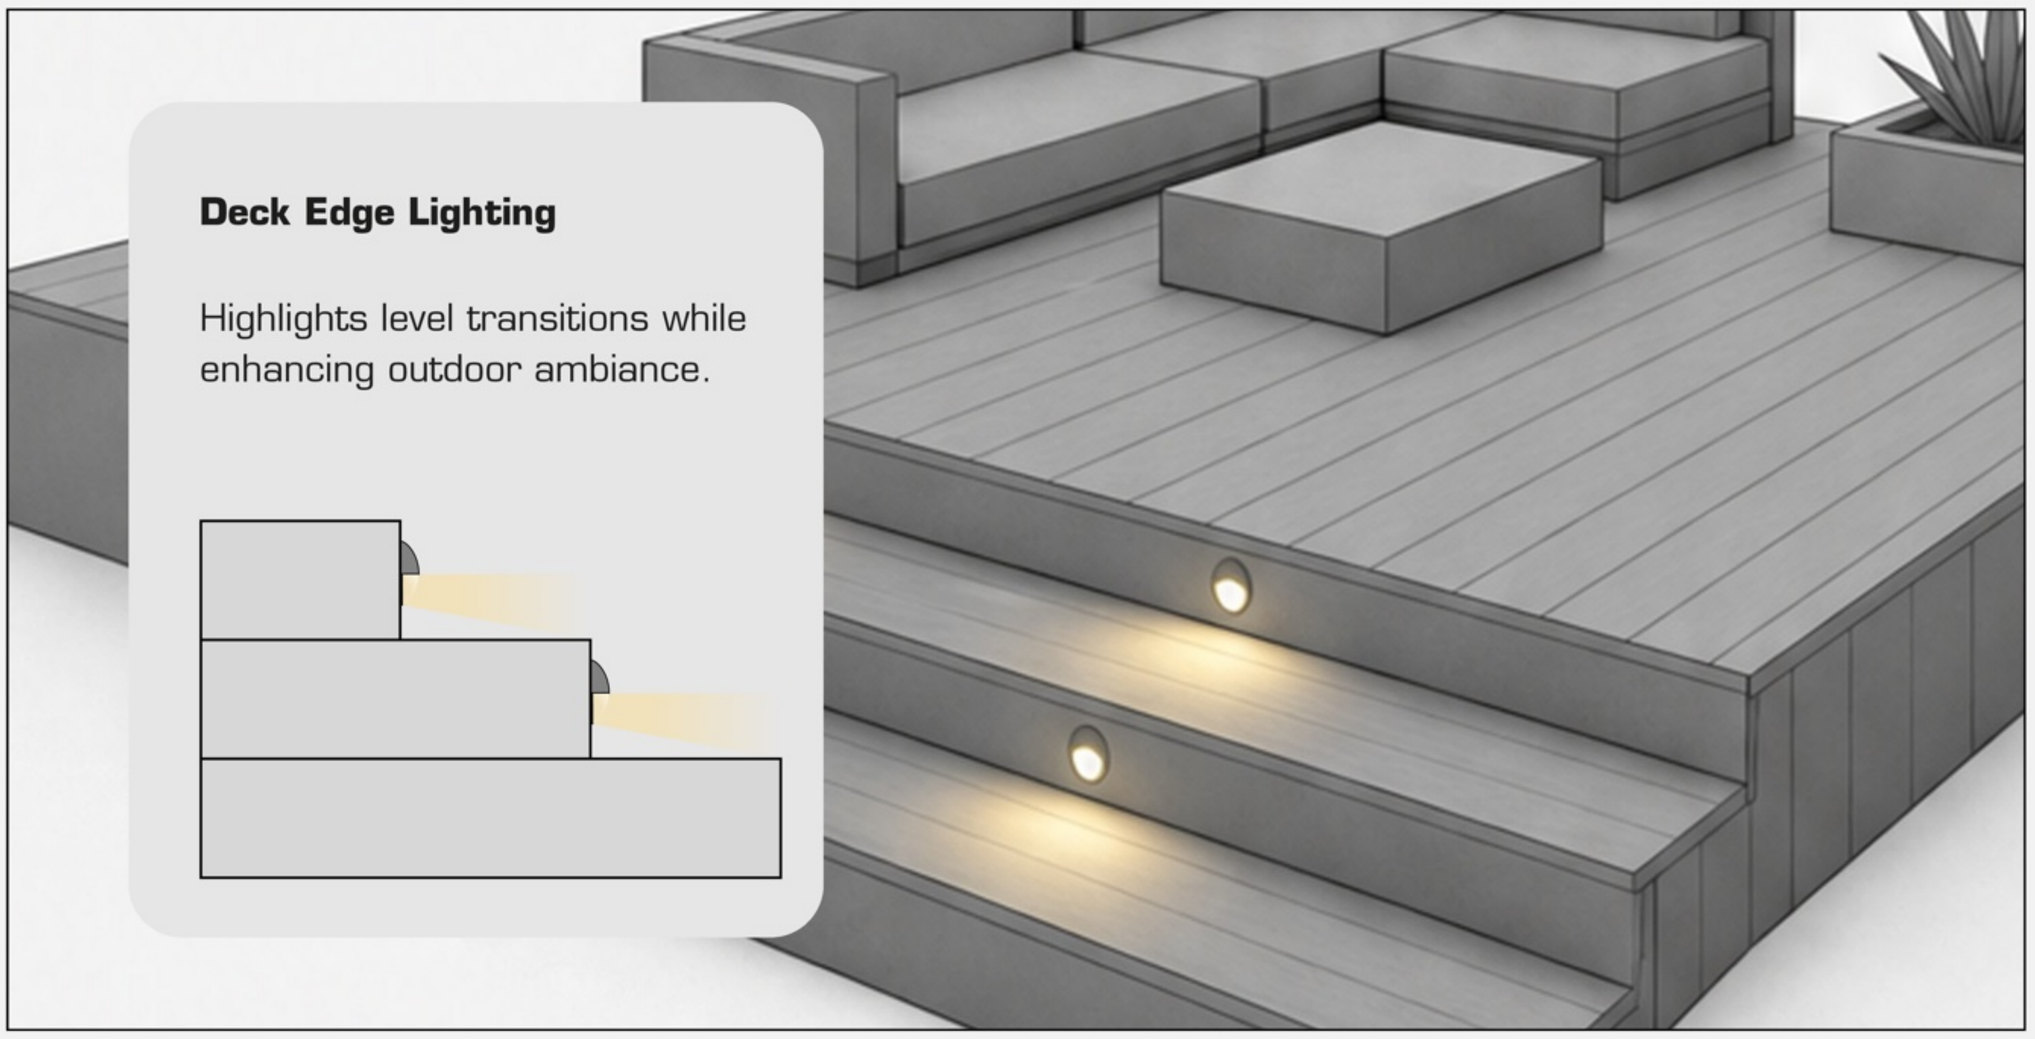


Deck Edge Lighting

Highlights level transitions while enhancing outdoor ambiance.



332352 **ST P-GR-5WRM-SQ/RC-2601/GR-5W-ILED**

- Step light
- Watt:5W
- Led:Bridgelux
- Driver: Customize quality standard
- Size:L85 *W85*H52mm
- AC100-240V 50/60Hz
- Material :Aluminum+Glass
- Ra80
- PF:0.5
- IP65



332353 **ST P-BL-5WRM-SQ/RC-2601/GR-5W-ILED**

- Step light
- Watt:5W
- Led:Bridgelux
- Driver: Customize quality standard
- Size: L85 *W85*H52mm
- AC100-240V 50/60Hz
- Material :Aluminum+Glass
- Ra80
- PF:0.5
- IP65



332354 **STP-BL-RAY-3WRM-SQ/RC-2684/GR-3W-ILED**

- Step light
- Watt:3W
- Led:Bridgelux
- Driver: Customize quality standard
- Size: L85*W85*H52mm
- AC100-240V 50/60Hz
- Material :PC+PMMA+aluminum
- Ra80
- PF:0.5
- IP65




332355 **STP-GR-RAY-3WRM-SQ/RC-2684/GR-3W-ILED**

- Step light
- Watt:3W
- Led:Bridgelux
- Driver: Customize quality standard
- Size: L85*W85*H52mm
- AC100-240V 50/60Hz
- Material :PC+PMMA+aluminum
- Ra80
- PF:0.5
- IP65




332356 **ST P-RAY-3WRM-145-RT /RC-2691/GR-3W-ILED**

- Step light
- Watt3W
- Led:Bridgelux
- Driver: Customize quality standard
- Size: 146*40*46
- AC100-240V 50/60Hz
- Material: PC+PMMA+aluminum
- Ra80
- PF:0.5
- IP65

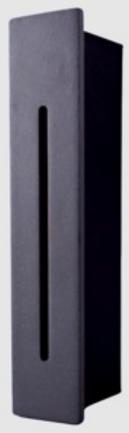

332357 **ST P-BL-RAY-3WRM-185-RT /RC-2692/GR-3W-ILED**

- Step light
- Watt:3W
- Led:Bridgelux
- Driver: Customize quality standard
- Size: 185*48*41
- AC100-240V 50/60Hz
- Material: PC+PMMA+aluminum
- Ra80
- PF:0.5
- IP65

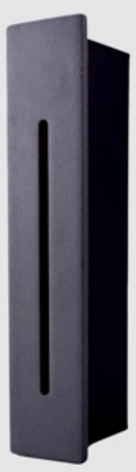

332358 **ST P-WH-RAY-3WRM-185-RT /RC-2692/GR-3W-ILED**

- Step light
- Watt:3W
- Led:Bridgelux
- Driver: Customize quality standard
- Size: 185*48*41
- AC100-240V 50/60Hz
- Material: PC+PMMA+aluminum
- Ra80
- PF:0.5
- IP65



332359 **ST P-BL-6WRM-RT /SR-2682/GR-6W-ILED**

- Surface step light
- Watt: 6W
- Led:Bridgelux
- Body size: L230*W80*H30mm
- AC100-240V 50/60Hz
- Material: PC+PMMA+aluminum
- Ra80
- PF:0.5
- IP65



332361 **ST P-BL/WH-6WRM-RT /SR-2680/GR-6W-ILED**

- Surface step light
- Watt: 6W
- Led:Bridgelux
- Body size: L230*W80*H30mm
- AC100-240V 50/60Hz
- Material: PC+PMMA+aluminum
- Ra80
- PF:0.5
- IP65



332362 **STP-BL-12WRM-50-RD/SR-FND-MZQJD1-12W-220H- ILED**

- Surface step light
- Watt: 12W
- Led:Philips
- Body size: 220*33mm
- AC100-240V 50/60Hz
- Material: PC+PMMA+aluminum
- Ra80
- PF:0.9
- IP65



332363 STP-GR-12WRM-50-RD/SR-FND-MZQJD1-12W-220H- ILED

- Surface step light
- Watt： 12W
- Led:Philips
- Body size： 220*33mm
- AC100-240V 50/60Hz
- Material:PC+PMMA+aluminum
- Ra80
- PF:0.9
- IP65



332364 STP-BL-6WRM-50-RD/SR-FND-MZQJD1-6W-117H-ILED

- Surface step light
- Watt： 6W
- Led:Philips
- Body size： 117*33mm
- AC100-240V50/60Hz
- Material： PC+PMMA+aluminum
- Ra80
- PF:0.9
- IP65




332365 STP-GR-6WRM-50-RD/SR-FND-MZQJD1-6W-117H-ILED

- Surface step light
- Watt： 6W
- Led:Philips
- Body size： 117*33mm
- AC100-240V50/60Hz
- Material： PC+PMMA+aluminum
- Ra80
- PF:0.9
- IP65



332366 STP-BL-12WRM-SQ/SR-FND-MZQJD2-12W-200H-ILED

- Surface step light
- Watt： 12W
- Led:Philips
- Body size： 200*33mm
- AC100-240V 50/60Hz
- Material： PC+PMMA+aluminum
- Ra80
- PF:0.9
- IP65



332367 STP-BL-6WRM-SQ/SRFND-MZQJD2-6W-117H-200H- ILED

- Surface step light
- Watt： 6W
- Led:Philips
- Body size： 117*33mm
- AC100-240V 50/60Hz
- Material： PC+PMMA+aluminum
- Ra80
- PF:0.9
- IP65



332368 **STP-BL-3WRM-25-RD/SR-FND-MZQJD2-3W-160H-ILED**

- Surfacesteplight
- Watt： 3W
- Led:Philips
- Body size：160*95mm
- AC100-240V50/60Hz
- Material：PC+PMMA+aluminum
- Ra80
- IP65
- PF:0.5



332369 **STP-BL-3WRM-RD/SR-FND-MZQJD2-3W-110H-ILED**

- Surface steplight
- Watt： 3W
- Led:Philips
- Body size：110*35mm
- AC100-240V 50/60Hz
- Material：PC+PMMA+aluminum
- Ra80
- PF:0.5
- IP65




332370 **ST P-BL-CAP-4WRM-SQ/SR-FND-MZQJD4-4W-160H- ILED**

- Surface step light
- Watt：4W
- Led:Philips
- Body size：160*160*10mm
- AC100-240V 50/60Hz
- Material：PC+PMMA+aluminum
- Ra80
- PF:0.9
- IP65

05 Globe

Globe




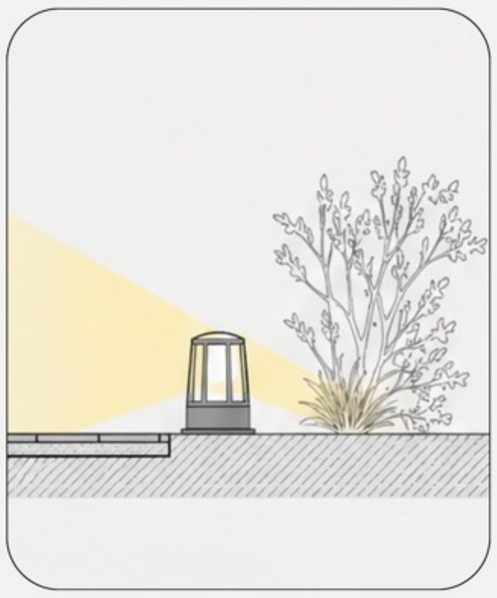

Pathway Illumination

Creates safe and comfortable lighting along pedestrian routes.




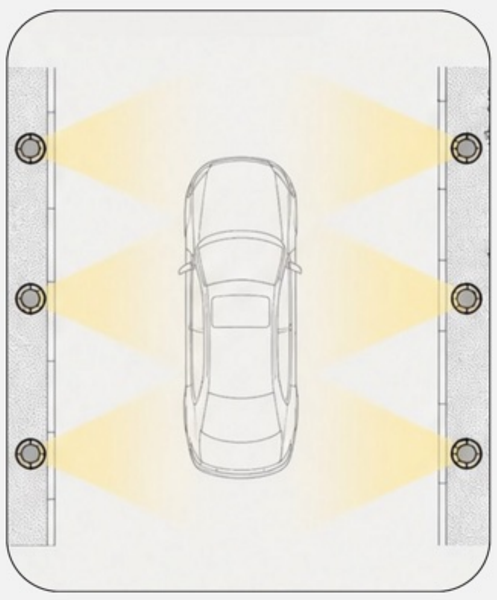

Driveway Guidance

Enhances visibility while adding elegance to entrances.



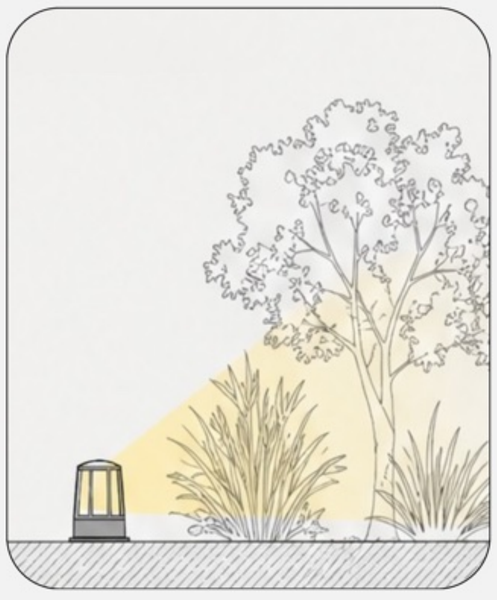

Landscape Accent

Highlights outdoor spaces with balanced ambient illumination.



332391	**FNCE-5WAY-FND-ZTD1-E27-150H-ILED**
332392	**FNCE-5WAY-FND-ZTD1-E27-220H-ILED**
332393	**FNCE-5WAY-FND-ZTD1-E27-300H-ILED**
332394	**FNCE-5WAY-FND-ZTD1-E27-400H-ILED**

- Globelight
- E27
- Size:150*H205/220*H275 /300*H335/4 00*H435MM
- AC100-240V 50/60Hz
- Material: aluminum
- IP65



332395	**FNCE-4WAY-FND-ZTD2-E27-195H-ILED**

- Globe light
- E27
- Size:195*195*H260MM
- AC100-240V 50/60Hz
- Material: aluminum
- IP65



332396	**FNCE-4WAY-FND-ZTD2-E27-190H-ILED**

- Globe light
- E27
- Size:190*H235MM
- AC100-240V 50/60Hz
- Material: aluminum
- IP65




332397	**FNCE-STRPS-FND-ZTD3-E27-268H-ILED**

- Globelight
- E27
- Body Diameter: 268*300mm
- AC100-240V 50/60Hz
- Material: aluminum+PC
- IP65

06
Wall Lights



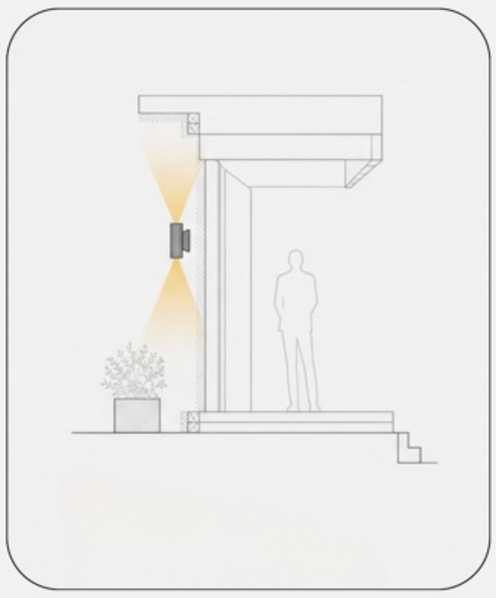

Entrance Lighting

Creates a welcoming architectural focal point while improving visibility.






Patio Illumination

Provides ambient lighting for outdoor living spaces with elegant architectural emphasis.



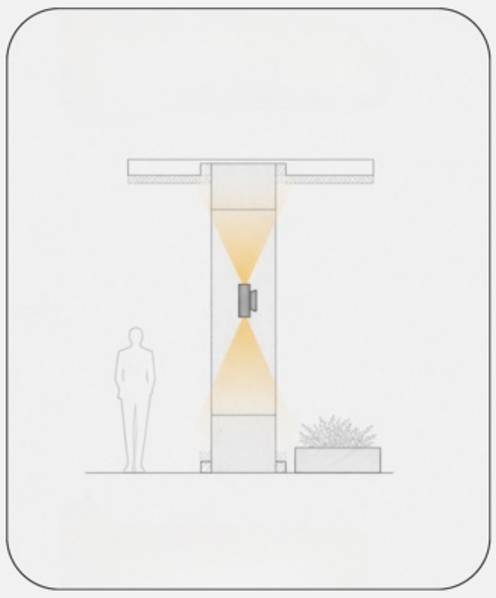

Column Accent

Enhances pillars and architectural elements with balanced vertical illumination.



332380 **APLC-BL-3D-12WRM-RT/SR-NA1031-ILED**

- LED wall light
- Watt:12W
- Led:OSRAM
- Driver： Customize quality standard
- 75Lm/w
- Size:260*100*160MM
- AC100-240V 50/60Hz
- Beam angle:120°
- Material: aluminum+PC
- Ra 80
- IP65
- PF:0.5



332381 **APLC-BL-3D-12WRM-RT/SR-NA1031 SENSOR-ILED**

- LED wall light
- Watt:12W
- Led:OSRAM
- Driver： Customize quality standard
- 75Lm/w
- Size:260*100*160MM
- AC100-240V 50/60Hz
- Beam angle:120°
- Material: aluminum+PC
- Ra 80
- IP65
- PF:0.5



332387 **APLC-4WAY-3D-12WRM-W21015PC-ILED**

- LED wall light
- Watt:12W
- Led:San an
- Driver： Customize quality standard
- Size:140*140*230MM
- AC100-240V 50/60Hz
- Material: aluminum
- Ra 80
- IP65
- PF:0.5



332398 **APLC-BL-3D-9WRM-RD/SR-W0336-ILED**

332399 **APLC-BL-3D-9WRM-RD/SR-W0336SS SENSOR-ILED**

- LED wall light
- Watt:9W
- Led:San an
- Driver： Customize quality standard
- Size:135*60*210MM
- AC100-240V 50/60Hz
- Beam angle:120°
- Material: aluminum
- 70Lm/w
- Ra80
- IP65
- PF:0.5



332400 **APLC-BL-3D-18WRM-RD/SR-W0312-ILED**

- LED wall light
- Watt:18W
- Led:San an
- Driver： Customize quality standard
- Size:220Xφ180X110MM
- AC100-240V 50/60Hz
- Beam angle:120°
- Material: aluminum
- 85Lm/w
- Ra80
- IP65
- PF:0.5



332410 **APLC-BL-4*3WRM-RAY-RD/SR-FND-BD1-12W-150H- ILED**

- LED outdoor wall light
- LED:LG 3W×4
- Driver:SZLCustomize quality standard
- Votage:AC85-265V 50/60Hz
- Size:150×150×50
- Material:aluminum
- Ra80
- IP65
- PF:0.5



332411 **APLC-BL-4*3WRM-RAY-SQ/SR-FND-BD2-12W-150H- ILED**

- LED outdoor wall light
- LED:LG 3W×4
- Driver:SZLCustomize quality standard
- Votage:AC85-265V 50/60Hz
- Size:150×150×50
- Material:aluminum
- Ra80
- IP65
- PF:0.5



332412 **DWN-BL-1*7WRM-FND-STBD2-7W-160H-ILED**

- LED outdoor wall light
- LED:LG 7W
- Driver:SZLCustomize quality standard
- Votage:AC85-265V 50/60Hz
- Size:90x160
- Beam angle:24°
- Material:aluminum
- 70 lm/w
- Ra97
- IP65
- PF:0.9



332413 **DWN-GR-1*7WRM-FND-STBD2-7W-160H-ILED**

- LED outdoor wall light
- LED:LG 7W
- Driver:SZLCustomize quality standard
- Votage:AC85-265V 50/60Hz
- Size:90x160
- Beam angle:24°
- Material:aluminum
- 70 lm/w
- Ra97
- IP65
- PF:0.9



332414 **UP/DWN-BL-2*7WRM-FND-STBD2-2*7W-260H-ILED**

- LED outdoor wall light
- LED:LG 2x7W
- Driver:SZLCustomize quality standard
- Votage:AC85-265V 50/60Hz
- Size:90x260
- Beam angle:24°
- Material:aluminum
- 70 lm/w
- Ra97
- IP65
- PF:0.9



332415 **UP/DWN-GR-2*7WRM-FND-STBD2-2*7W-260H-ILED**

- LED outdoor wall light
- LED:LG 2x7W
- Driver:SZLCustomize quality standard
- Votage:AC85-265V 50/60Hz
- Size:90x260
- Beam angle:24°
- Material:aluminum
- 70 lm/w
- Ra97
- IP65
- PF:0.9



332416 **DWN-BL-1*10WRM-FND-STBD2-10W-200H-ILED**

- LED outdoor wall light
- LED:LG 10W
- Driver:SZLCustomize quality standard
- Votage:AC85-265V 50/60Hz
- Size:108x200
- Beam angle:24°
- Material:aluminum
- 80 lm/w
- Ra97
- IP65
- PF:0.9



332417 **DWN-GR-1*10WRM-FND-STBD2-10W-200H-ILED**

- LED outdoor wall light
- LED:LG 10W
- Driver:SZLCustomize quality standard
- Votage:AC85-265V 50/60Hz
- Size:108x200
- Beam angle:24°
- Material:aluminum
- 80 lm/w
- Ra97
- IP65
- PF:0.9




332418 **UP/DWN-BL-2*10WRM-FND-STBD2-2*10W-300H-ILED**

- LED outdoor wall light
- LED:LG 2x10W
- Driver:SZLCustomize quality standard
- Votage:AC85-265V 50/60Hz
- Size:108x300
- Beam angle:24°
- Material:aluminum
- 90 lm/w
- Ra97
- IP65
- PF:0.9



332419 **UP/DWN-GR-2*10WRM-FND-STBD2-2*10W-300H-ILED**

- LED outdoor wall light
- LED:LG 2x10W
- Driver:SZLCustomize quality standard
- Votage:AC85-265V 50/60Hz
- Size:108x300
- Beam angle:24°
- Material:aluminum
- 90 lm/w
- Ra95
- IP65
- PF:0.9



332420 **UP-BL-FND-STBD2-E27-160H-ILED**

- Outdoor wall light
- Lamp holder:E27
- Power:5W(LED)
- Votage:220-240V 50/60Hz
- Size:90x160
- Material:aluminum
- IP65



332421 **UP-GR-FND-STBD2-E27-160H-ILED**

- Outdoor wall light
- Lamp holder:E27
- Power:5W(LED)
- Votage:220-240V 50/60Hz
- Size:90x160
- Material:aluminum
- IP65



332422 **UP/DWN-BL-FND-STBD2-2*E27-260H-ILED**

- Outdoor wall light
- Lamp holder:2*E27
- Power:2*5W(LED)
- Votage:220-240V 50/60Hz
- Size:90x260
- Material:aluminum
- IP65



332423 **UP/DWN-BL-FND-STBD2-2*E27-300H-ILED**

- Outdoor wall light
- Lamp holder:2*E27
- Power:2*5W(LED)
- Votage:220-240V 50/60Hz
- Size:108x300
- Material:aluminum
- IP65

07


Bollard

Bollard




Pathway Lighting

Provides comfortable pedestrian guidance with controlled downward illumination.

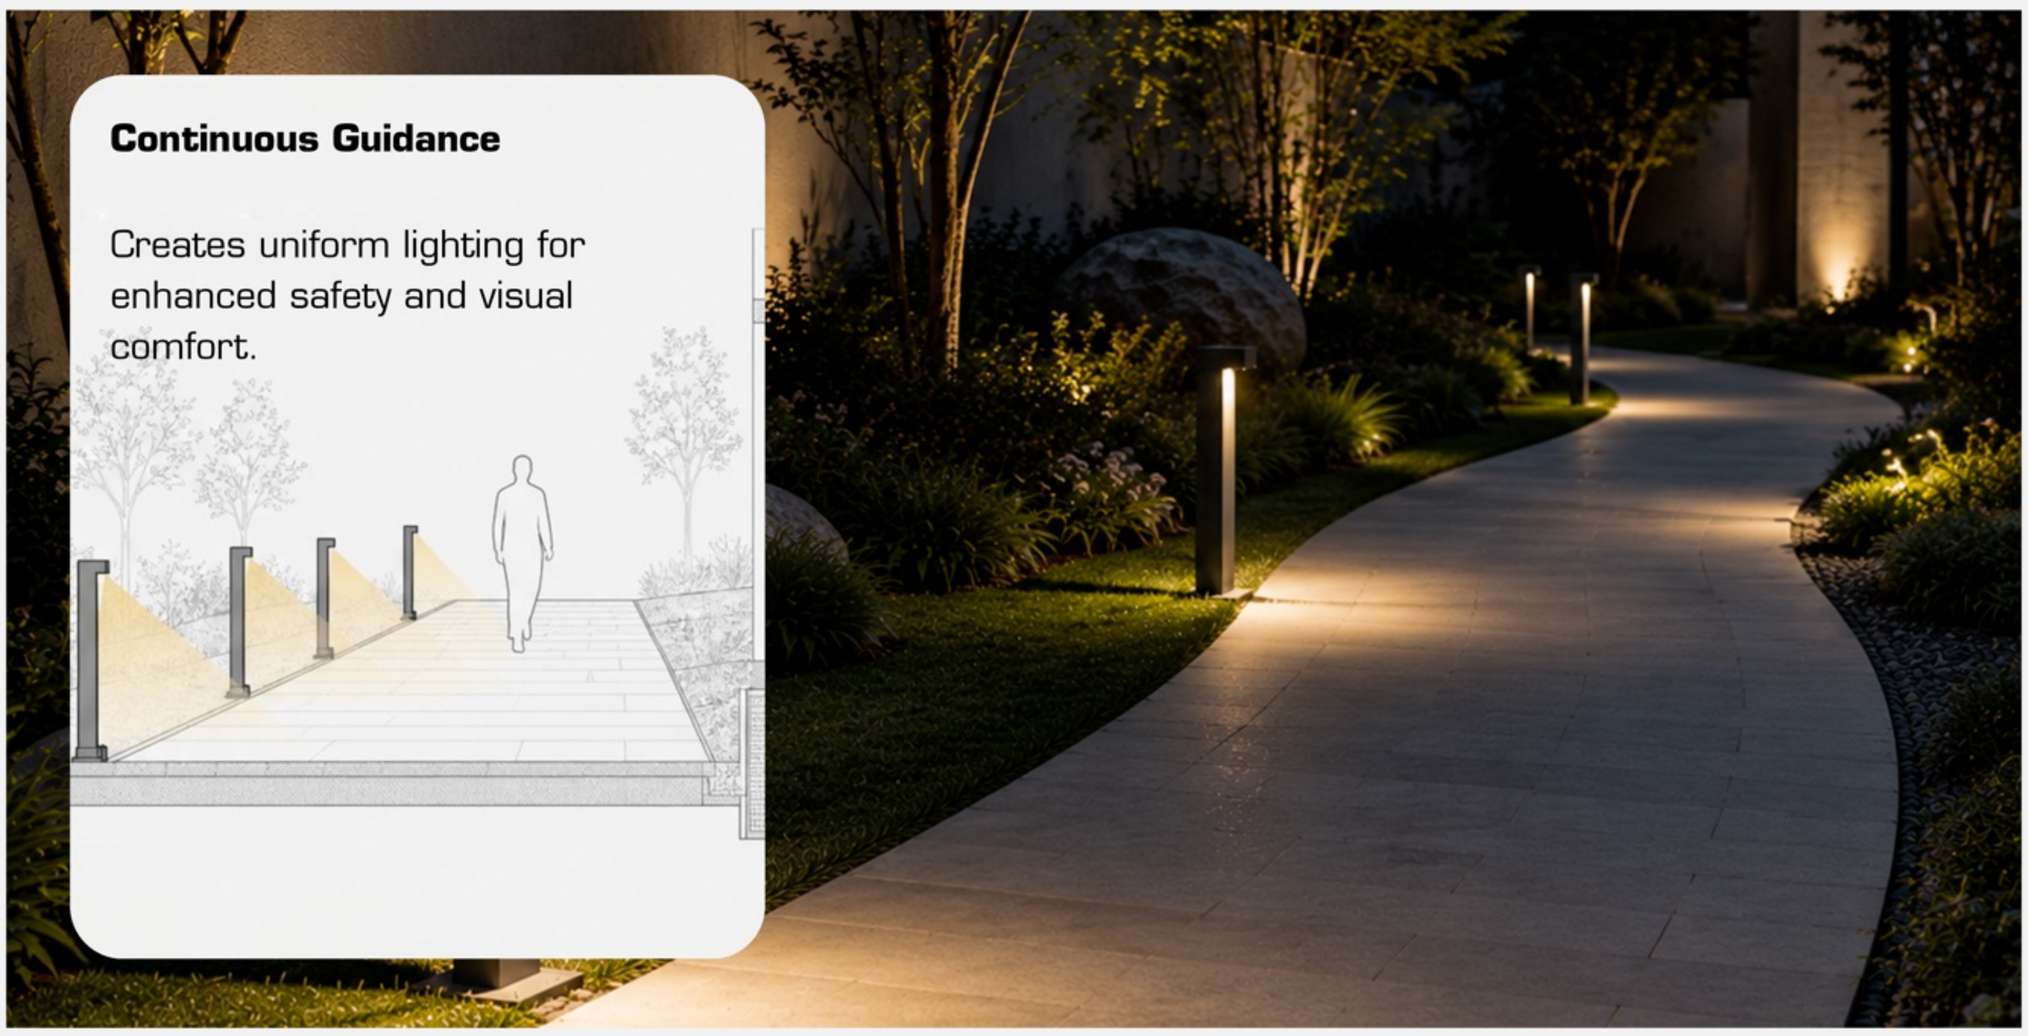

Continuous Guidance

Creates uniform lighting for enhanced safety and visual comfort.

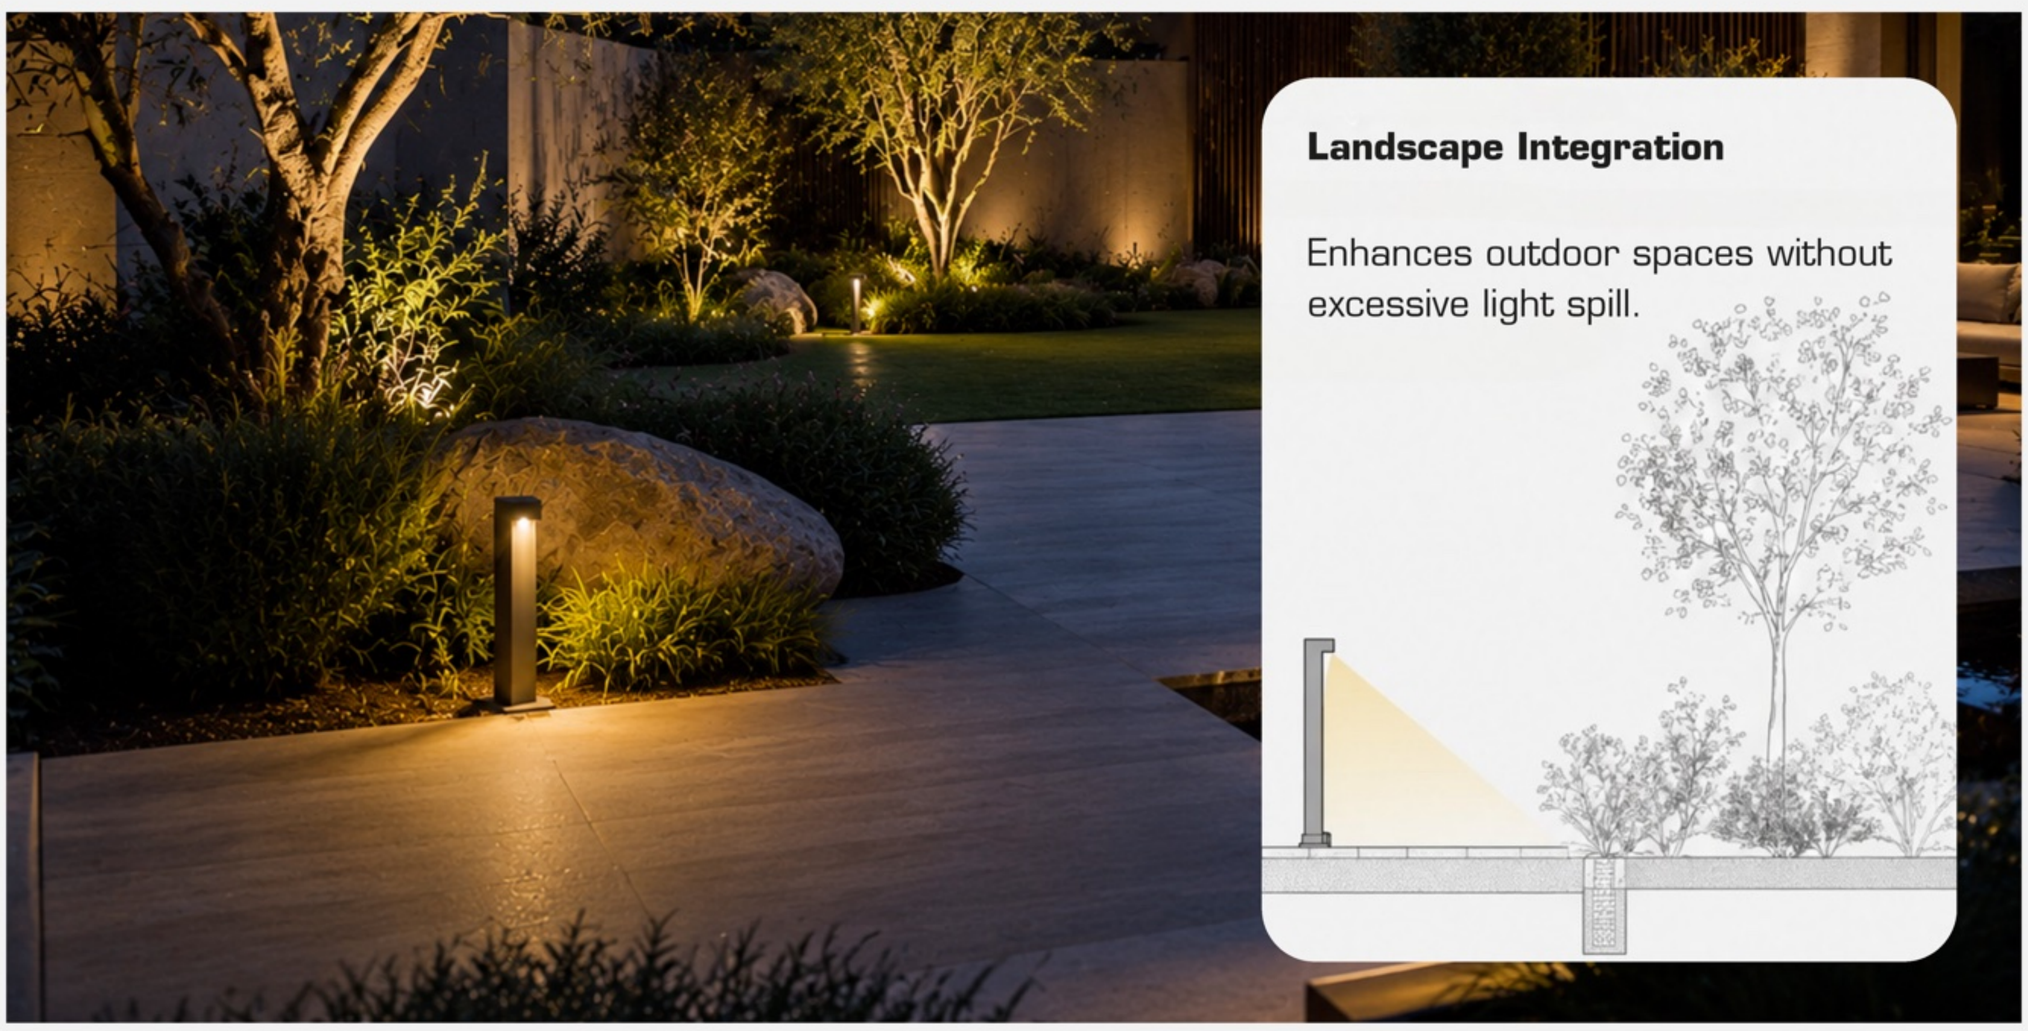

Landscape Integration

Enhances outdoor spaces without excessive light spill.



332377 **BLRD-4WAY-7WRM-76002-3-ILED**

- Bollard light
- LED:Bridgelux 7W×1
- Driver:Customize quality Bridgelux 7W×1 standard
- Votage:AC85-265V 50/60Hz Size:110×110×300
- Beam angle:120°
- Material:aluminum
- Ra97
- IP65
- PF:0.5



332378 **BLRD-4WAY-7WRM-76002-6-ILED**

- Bollard light
- LED:Bridgelux 7W×1
- Driver:Customize quality Bridgelux 7W×1 standard
- Votage:AC85-265V 50/60Hz
- Size:110×110×600
- Beam angle:120°
- Material:aluminum
- Ra97
- IP65
- PF:0.5



332379 **BLRD-4WAY-7WRM-76002-8-ILED**

- Bollard light
- LED:Bridgelux 7W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:110×110×800
- Beam angle:120°
- Material:aluminum
- Ra97
- IP65
- PF:0.5



332382 **BLRD-RT -1WAY-12WRM-NA1032-80-ILED**

- *Bollard light
- *Watt:12W
- *Led:OSRAM
- *Driver： Customize quality standard
- *Size:140*800MM
- * AC100-240V 50/60Hz
- *75Lm/w
- *Ra 80
- *IP65
- *PF:0.5
-



332384 **BLRD-RT -1WAY-12WRM-NA1032-100-ILED**

- Bollard light
- *Watt:12W
- *Led:OSRAM
- *Driver： Customize quality standard
-
- *Size:140*1000MM
- * AC100-240V 50/60Hz
- *Beam angle:120°
- *Material: aluminum+PC
- *75Lm/w
- *Ra 80
- *IP65
- *PF:0.5
-



332385 **BLRD-L-1WAY-1*8WRM-NA1041-6-ILED**

- Bollard light
- *Watt:8W
- *Led:CREE
- *Driver： Customize quality standard *Size:90*600MM
- * AC100-240V 50/60Hz
- *Material: aluminum+Glass
- *Ra 80
- *IP65
- *PF:0.5
-



332386 **BLRD-L-1WAY-1*8WRM-NA1041-8-ILED**

- Bollard light
- *Watt:8W
- *Led:CREE
- *Driver： Customize quality standard * Size:90*800MM
- * AC100-240V 50/60Hz
- *Material: aluminum+Glass
- *Ra 80
- *IP65
- *PF:0.5
-



332388 **BLRD-4WAY-3D-12WRM-21015PC/300-ILED**

332389 **BLRD-4WAY-3D-12WRM-21015PC/600-ILED**

332390 **BLRD-4WAY-3D-12WRM-21015PC/800-ILED**

- *Bollard light
- *Watt:12W
- *Led:San an
- *Driver： Customize quality standard *Size:140*140*H300/H600/H800MM
- * AC100-240V 50/60Hz
- *Material: aluminum
- *Ra 80
- *IP65
- *PF:0.5
-



332401 **BLRD-RD-1*7WRM-76106-3-ILED**

- *Bollard light
- *LED:Bridgelux 7W×1 *Driver:Customize quality standard *Votage:AC85-265V 50/60Hz *Size:Φ150×300
- *Material:aluminum
- *Ra80
- *IP65
- *PF:0.5
-



332402 **BLRD-RD-1*7WRM-76106-6-ILED**

- *Bollard light
- *LED:Bridgelux 7W×1 *Driver:Customize quality standard *Votage:AC85-265V 50/60Hz *Size:Φ150×600
- *Material:aluminum
- *Ra80
- *IP65
- *PF:0.5
-



332403 **BLRD-RD-1*7WRM-76106-8-ILED**

- Bollard light
- LED:Bridgelux 7W×1
- Driver:Customize quality standard
- Votage:AC85-265V50/60Hz
- Size:Φ150×800
- Material:aluminum
- Ra80
- IP65
- PF:0.5



332404 **BLRD-C-1WAY-1*5WRM-76118-6-ILED**

- Bollard light
- LED:Bridgelux 5W×1
  Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:100×100×600
- Material:aluminum
- Ra80
- IP65
- PF:0.5



332405 **BLRD-C-1WAY-1*7WRM-76118-8.5-ILED**

- Bollard light
- LED:Bridgelux 7W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:110×110×800
- Material:aluminum
- Ra97
- IP65
- PF:0.5



332406 **BLRD-T-2WAY-2*5WRM-76119-6-ILED**

- Bollard light
- LED:Bridgelux 2×5W
  Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:170×100×600
- Beam angle:120°
- Material:aluminum
- Ra97
- IP65
- PF:0.5



332407 **BLRD-2WAY-1*7WRM-78001-3-ILED**

- Bollard light
- LED:Bridgelux 7W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:165×55×300
- Material:aluminum
- Ra97
- IP65
- PF:0.5



332408 **BLRD-2WAY-1*7WRM-78001-6-ILED**

- Bollard light
- LED:Bridgelux 7W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:165×55×600
- Material:aluminum
- Ra97
- IP65
- PF:0.5



332409 **BLRD-2WAY-1*7WRM-78001-8-ILED**

- *Bollard light
- *LED:Bridgelux 7W×1
  *Driver:Customize quality standard
  *Votage:AC85-265V 50/60Hz
  *Size:165×55×800
  *Material:aluminum
- *Ra97
- *IP65
- *PF:0.5
-

08


Surface Downlights

Surface Downlights




Entrance Lighting

Provides focused illumination at entrances, improving visibility while creating a clean, welcoming architectural appearance.

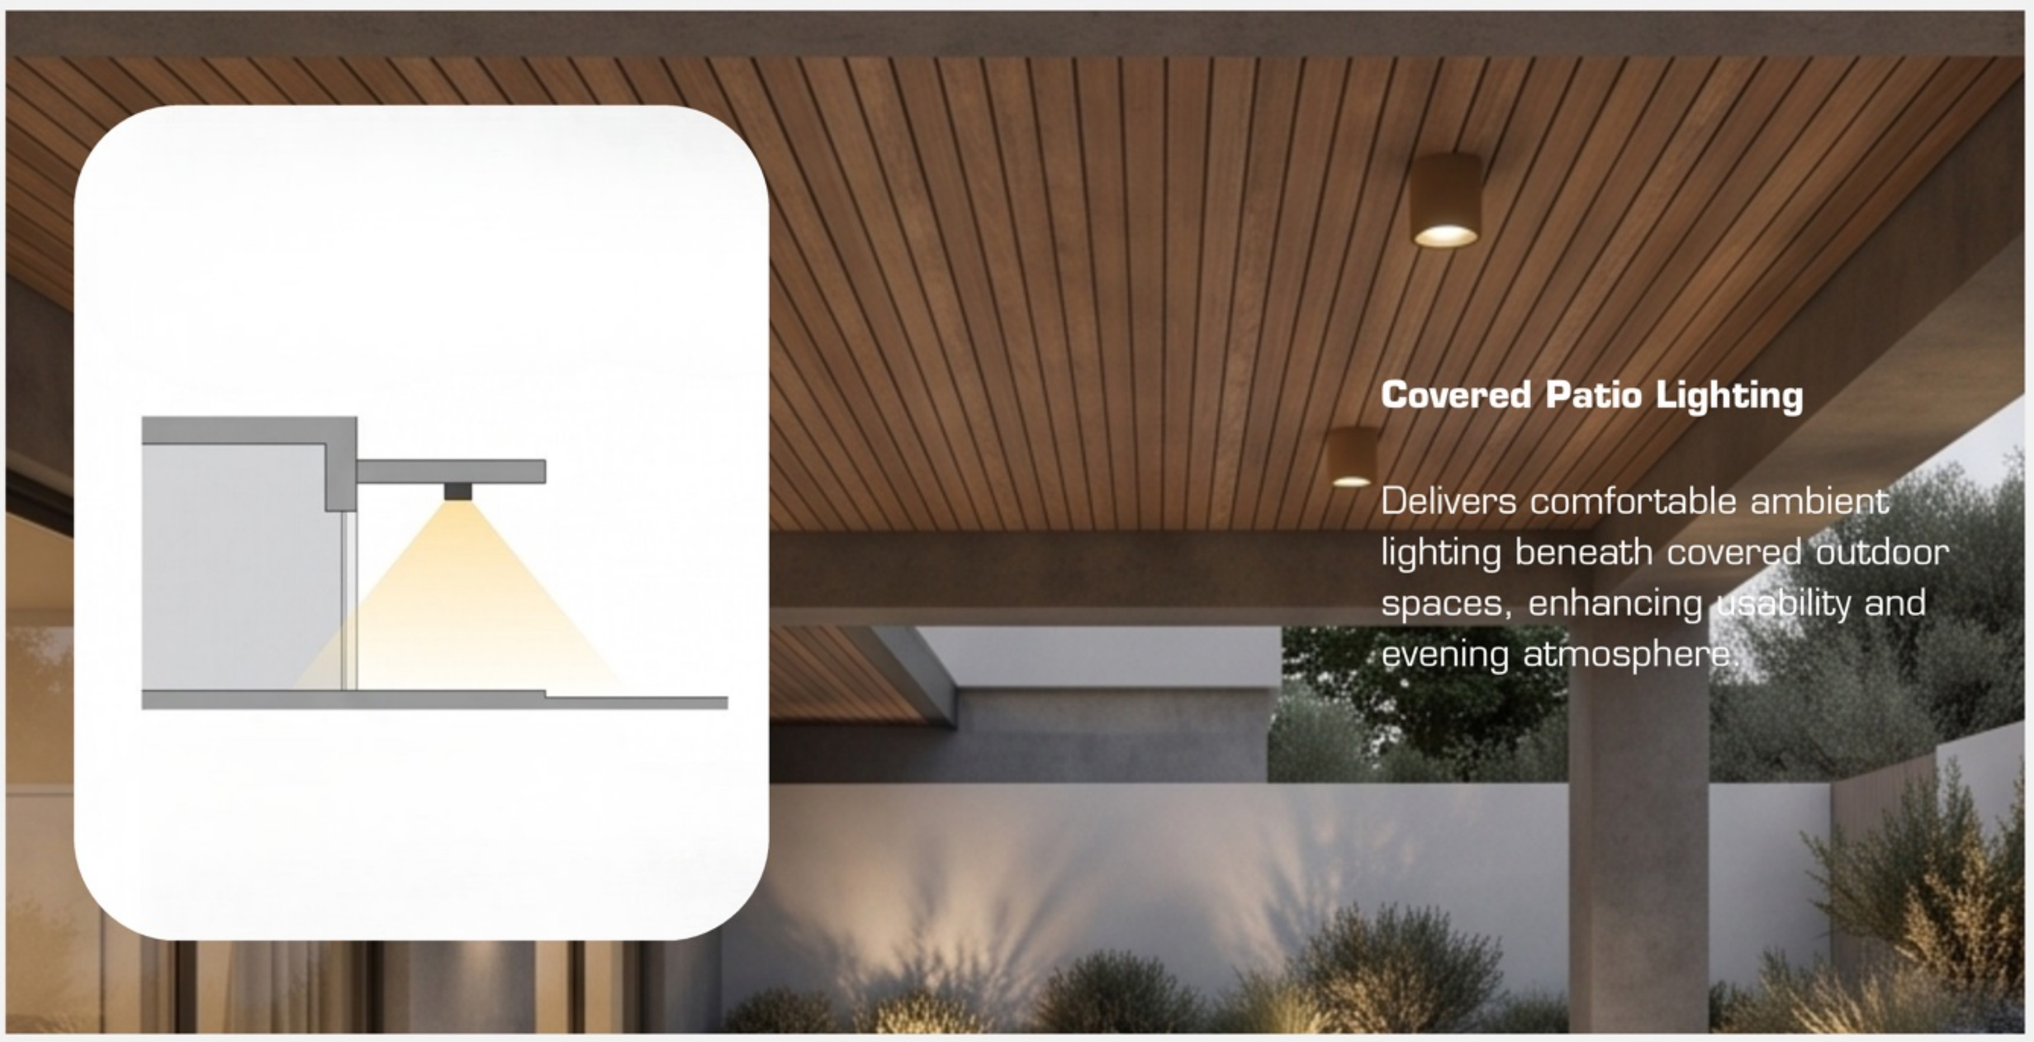

Covered Patio Lighting

Delivers comfortable ambient lighting beneath covered outdoor spaces, enhancing usability and evening atmosphere.

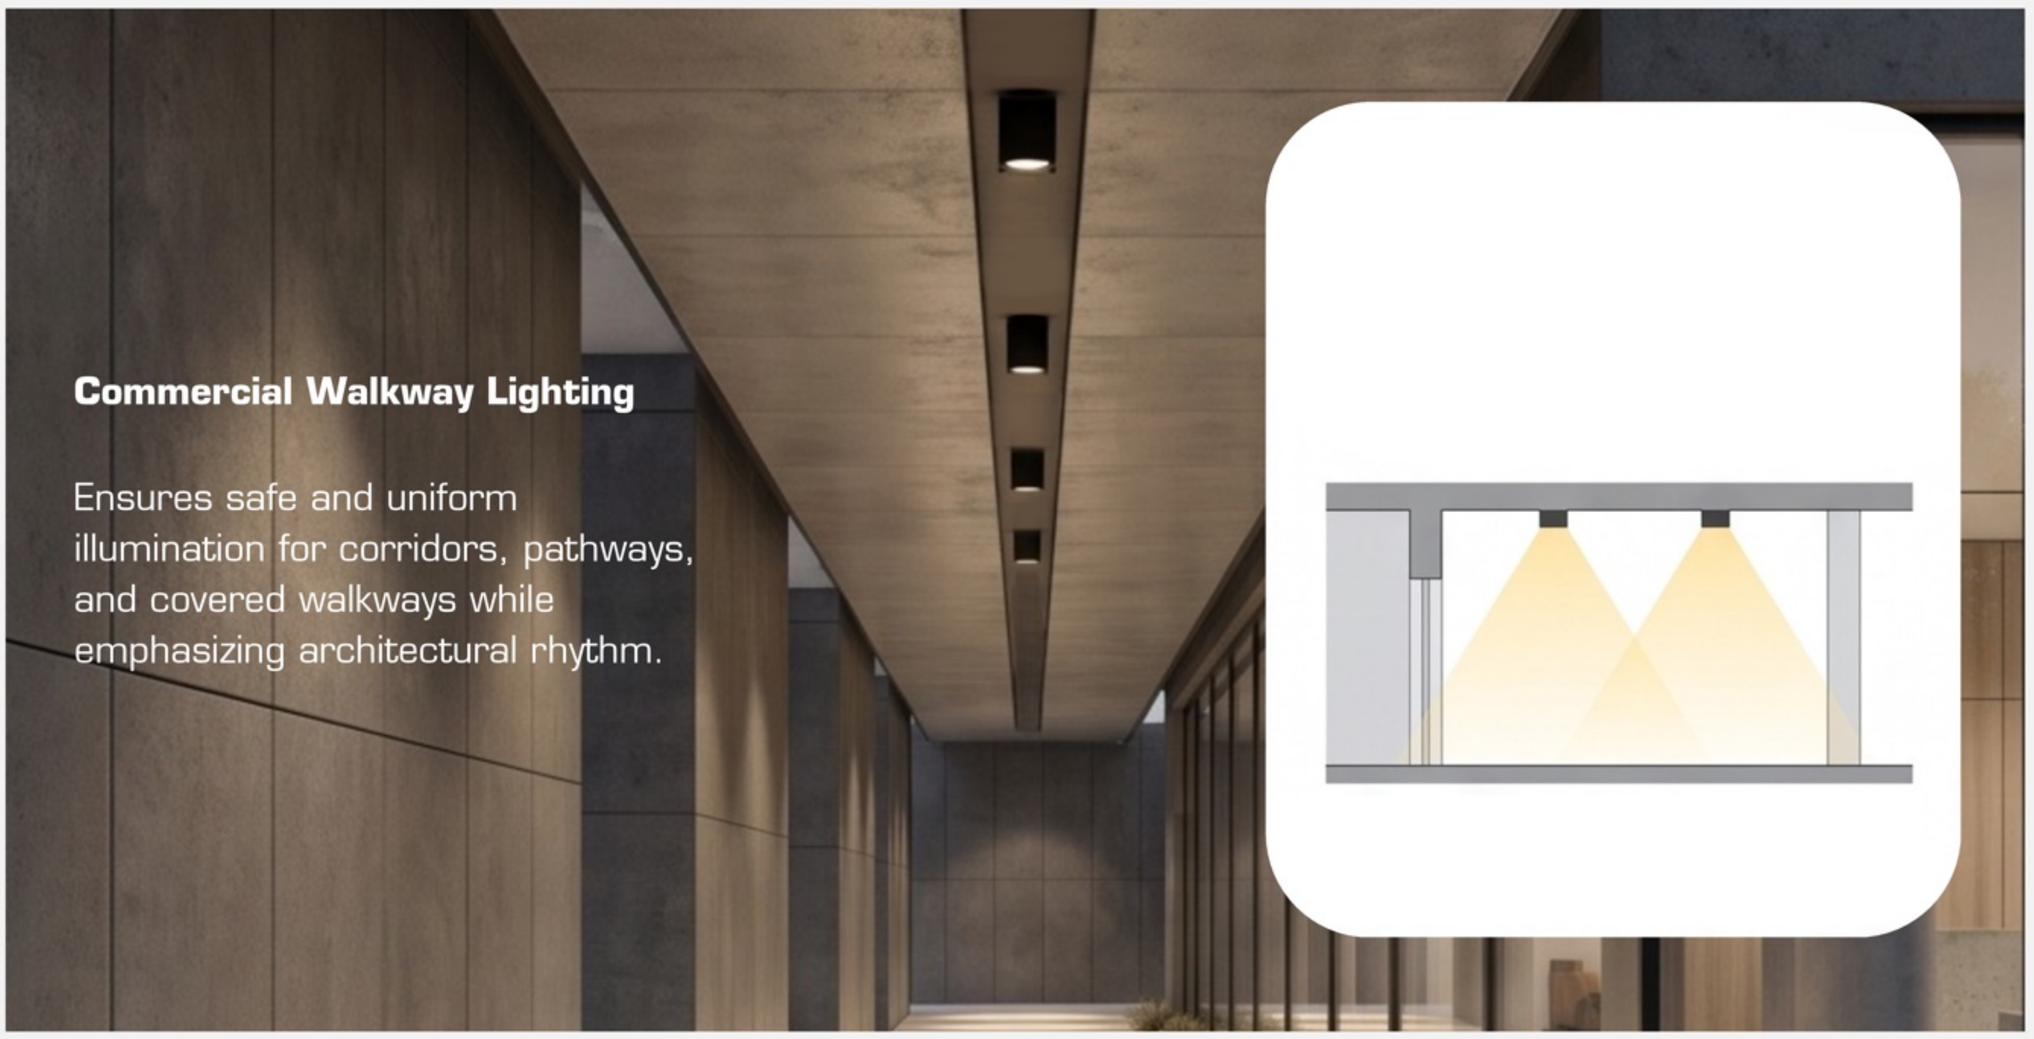

Commercial Walkway Lighting

Ensures safe and uniform illumination for corridors, pathways, and covered walkways while emphasizing architectural rhythm.



332424 **CYLN-BL-5WRM-SQ/SR-8511-05-01-ILED**

- LED outdoor Ceiling light
- LED:Bridgelux 5W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:65×65×80
- Beam angle:38°
- Material:aluminum
- 80 lm/w
- Ra97
- IP65
- PF:0.5



332425 **CYLN-BL-7WRM-SQ/SR-8512-07-01-ILED**

- LED outdoor Ceiling light
- LED:Bridgelux 7W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:90×90×100
- Beam angle:38°
- Material:aluminum
- 80 lm/w
- Ra97
- IP65
- PF:0.5



332426 **CYLN-BL-10WRM-SQ/SR-8511-10-ILED**

- LED outdoor Ceiling light
- LED:Bridgelux 10W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:65×65×120
- Beam angle:38°
- Material:aluminum
- 80 lm/w
- Ra97
- IP65
- PF:0.5



332427 **CYLN-BL-15WRM-SQ/SR-8512-15-ILED**

- LED outdoor Ceiling light
- LED:Bridgelux 15W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:90×90×140
- Beam angle:38°
- Material:aluminum
- 80 lm/w
- Ra97
- IP65
- PF:0.5



332428 **CYLN-BL-5WRM-RD/SR-8521-5-ILED**

- LED outdoor Ceiling light
- LED:Bridgelux 5W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:Φ65×80
- Beam angle:38°
- Material:aluminum
- 80 lm/w
- Ra97
- IP65
- PF:0.5



332429 **CYLN-BL-7WRM-RD/SR-8522-7-ILED**

- LED outdoor Ceiling light
- LED:Bridgelux 7W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:Φ90×100
- Beam angle:38°
- Material:aluminum
- 80 lm/w
- Ra97
- IP65
- PF:0.5



332430 **CYLN-BL-10WRM-RD/SR-8521-10-ILED**

- LED outdoor Ceiling light
- LED:Bridgelux
- 10W×1*Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:Φ65×120
- Beam angle:38°
- Material:aluminum
- 80 lm/w
- Ra97
- IP65
- PF:0.5




332431 **CYLN-BL-15WRM-RD/SR-8522-15-ILED**

- LED outdoor Ceiling light
- LED:Bridgelux 15W×1
- Driver:Customize quality standard
- Votage:AC85-265V 50/60Hz
- Size:Φ90×140
- Beam angle:38°
- Material:aluminum
- 80 lm/w
- Ra97
- IP65
- PF:0.5

09 Wall Washers

Wallwashers




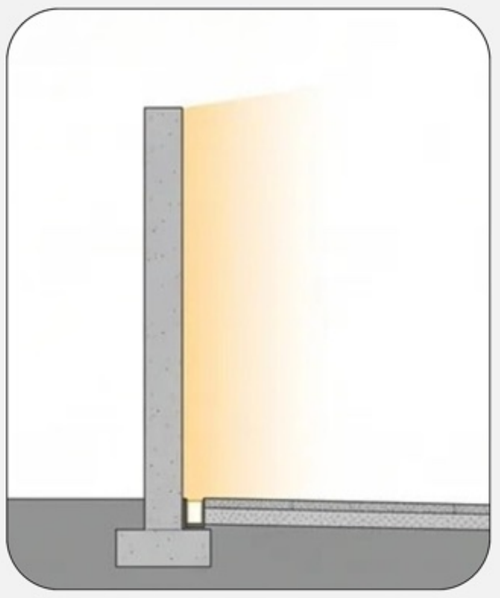

Wall Washing

Creates smooth vertical illumination that highlights textures and architectural finishes.




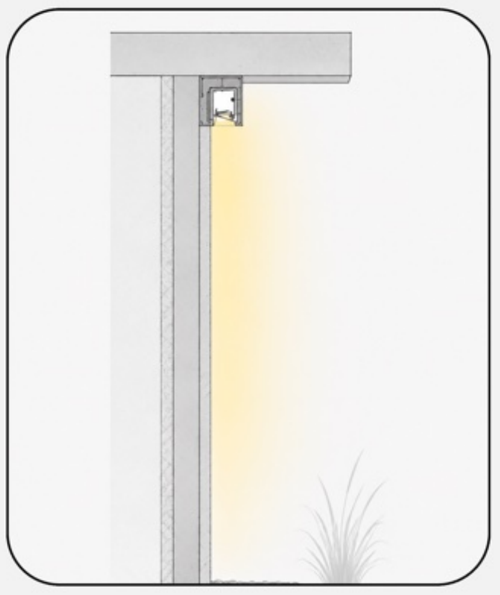

Overhead Wall Washing

Produces a seamless top-down light wash that accentuates textures and clean architectural lines.



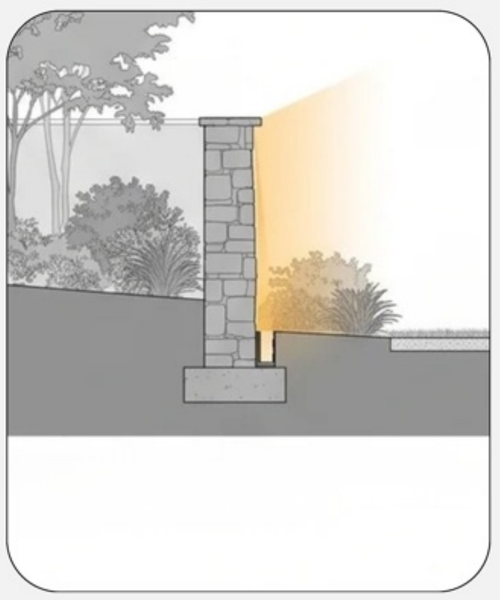

Landscape Walls

Accentuates retaining walls and landscape features while adding depth to outdoor environments.



332433 **WSHR-HP-24WRM-RT /SR-W-100-24W-ILED**

- LED wall washer
- LED : CREE 24w
- Driver:ELSEWEDY
- Votage:AC85-265V 50/60Hz
- Size:40*27*1000MM
- Beam angle:15*45°
- Material:aluminum+Tempered Glass
- 70 lm/w
- Ra80
- IP65
- PF:0.9



332434 **WSHR-HP-12WRM-RT /SR-W-100-12W-ILED**

- LED wall washer
- LED : CREE 12w
- Driver:ELSEWEDY
- Votage:AC85-265V 50/60Hz
- Size:40*27*500MM
- Beam angle:15*45°
- Material:aluminum+Tempered Glass
- 70 lm/w
- Ra80
- IP65
- PF:0.9

ELSEWEDY LIGHTING & CABLES CO.

Ahmed Emad Elsewedy

Contact Us
Head Office: 4 El DabtiaSt. Attaba,Cairo,Egypt.
Showrooms: Izar Mall, Palm Hills,El-SheikhZayed, Giza, Egypt,
4 El Dabtia St. Attaba, Cairo, Egypt.
Mobile: 01005389998 - 01000055557
Email: info@elsewedylighting.com
Website: www.elsewedylighting.com
Hotline: 19582

www.elsewedylightingandcables.co